FLOS

KAP SURFACE WALL Ø100

Number of heads	I
Mounting	Wall surface
Lamps description	Power LED 9
Luminaire luminous flux	Extreme Cut
Voltage (V)	220/240
Environment	Indoor

Wall surface Power LED 9W 850 lm 3000K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

OPTICAL

Reflector finishGoldAimingFixedLight distribution symmetrySymmetricBeam angle33°

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class


Integral Electronic Without Class I

Included

PHYSICAL

Diameter (mm)	100
Height (mm)	236
Construction material	Extru
Weight (kg)	0,90

100 236 Extruded aluminum 0 90

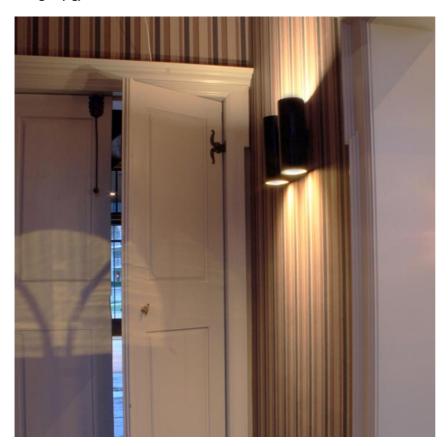




Kap Surface Wall Ø100 designed by FLOS Architectural

Luminaire for wall mounting with led light source. nonregulable 220-240V, 50-60hz power supply integrated in luminaire body.

🥖 03.5731.11A - 359lm	White / Matt Gold
🥏 03.5731.ASA - 359lm	Brushed Aluminium / Matt Gold
🏉 03.5731.ANA - 359lm	Black / Matt Gold
🏉 03.5731.B3A - 359lm	Brown / Matt Gold



CERTIFICATIONS



IP

20

F,





F

Kap Surface Wall Ø100. Lamps




Power LED Lamp category: LED Socket: Special base Lamp type: Power LED



Kap Surface Wall Ø100 designed by FLOS Architectural

Luminaire for wall mounting with led light source. nonregulable 220-240V, 50-60hz power supply integrated in luminaire body.





CERTIFICATIONS **E 6**3

IP 20





