

MINI GLO-BALL S DALI VERSION

Number of heads	1
Mounting	Track pendant
Type of ceiling pendant	Suspension cable
Lamps description	Power LED 3,5W 400 lm 2700K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	Maximum 14 spots for a single driver.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III

PHYSICAL


Weight (kg)	0,40
--------------------	------




Mini Glo-Ball S Dali Version designed by FLOS Architectural

General lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

● 03.6262.14.DA - 258lm Black

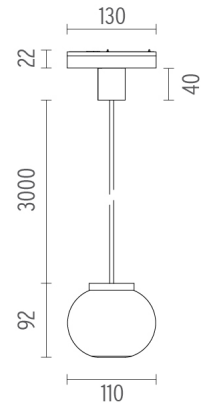

CERTIFICATIONS

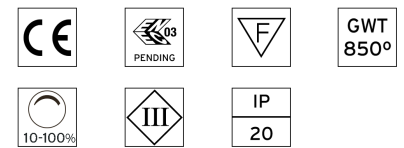

Mini Glo-Ball S Dali Version . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Mini Glo-Ball S Dali Version
designed by FLOS Architectural

General lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

● 03.6262.14.DA - 258lm Black

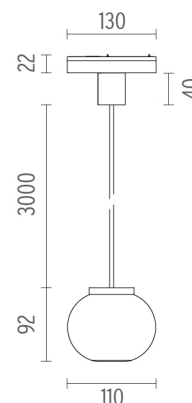

CERTIFICATIONS

