

SPOT 120 DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED 14W 1060 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	24
Environment	Indoor
Notes	Maximum 11 spots for a single driver. Accessories included (honeycomb and screening crosspiece).



OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	25° Spot

Spot 120 Dali Version designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III



●	03.6284.40.DA - 731lm	White
●	03.6284.14.DA - 731lm	Black

PHYSICAL

Spot diameter (mm)	46
Weight (kg)	0,35



CERTIFICATIONS

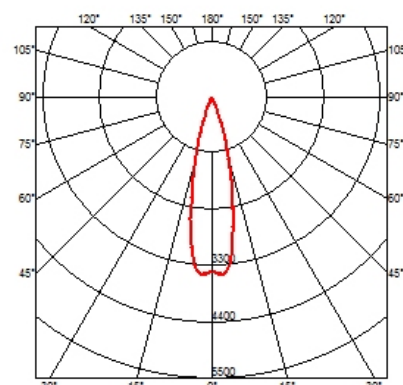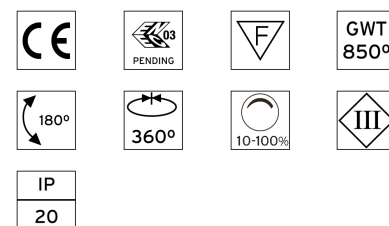

Spot 120 Dali Version . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Spot 120 Dali Version
designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

- 03.6284.40.DA - 73 lIm White
- 03.6284.14.DA - 73 lIm Black



CERTIFICATIONS

