SPOT 120 DALI VERSION

Number of heads

Mounting Track mounting

Power LED 14W 985 lm 2700K CRI 90 Lamps description Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 24 **Environment** Indoor

Notes Maximum 11 spots for a single driver. Accessories included (honeycomb and screening crosspiece).

OPTICAL

Aiming Adjustable Light distribution symmetry Symmetric Beam angle 25° Spot

ELECTRICAL


Transformer availability Separate item **Transformer mounting** Remote

Transformer type Electronic dimmable dali

Without **Emergency Insulation class** Class III

PHYSICAL

46 Spot diameter (mm) Weight (kg) 0,35

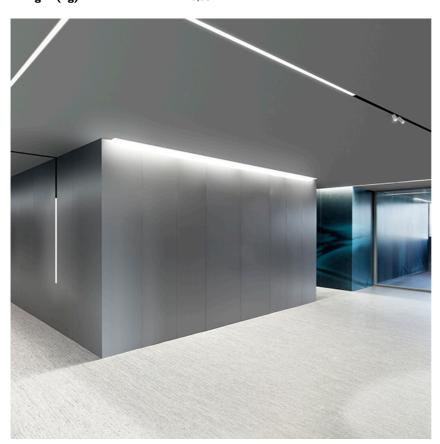




Spot 120 Dali Version designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

03.6285.40.DA - 707lm White 03.6285.14.DA - 707lm Black



CERTIFICATIONS


















ΙP 20



Flos.architectural@flos.com www.flos.com



Spot 120 Dali Version . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:


Power LED



Spot 120 Dali Version designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

03.6285.40.DA - 707lm White
03.6285.14.DA - 707lm Black



CERTIFICATIONS



















