

SPOT 120 DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED 14W 985 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	24
Environment	Indoor
Notes	Maximum 11 spots for a single driver. Accessories included (honeycomb and screening crosspiece).

OPTICAL


Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Medium

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III

PHYSICAL

Spot diameter (mm)	46
Weight (kg)	0,35

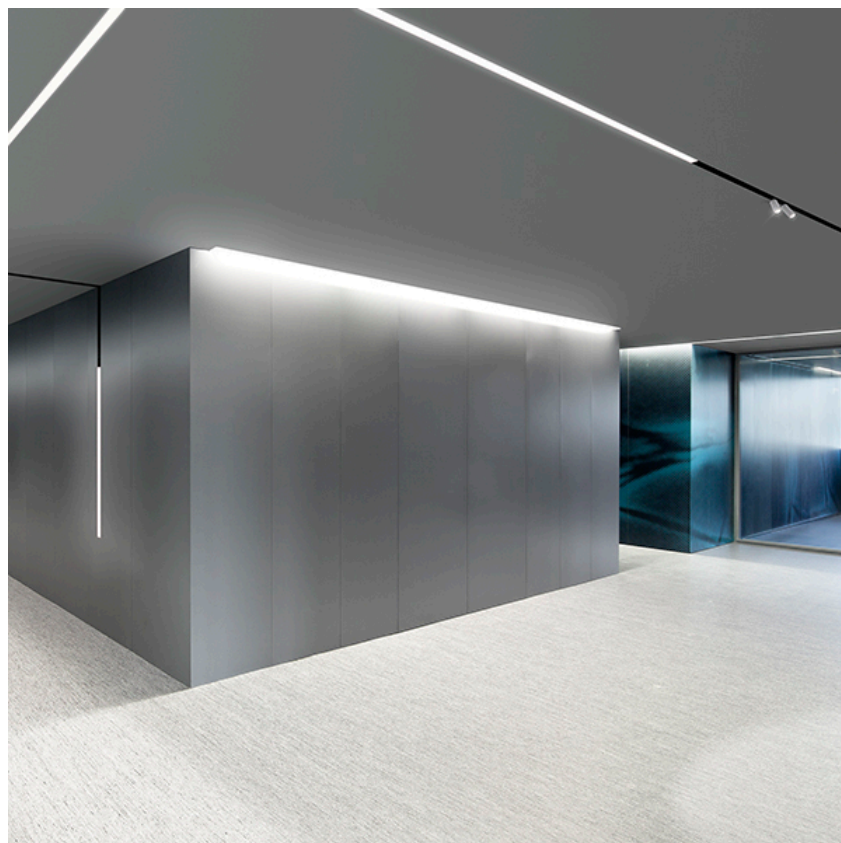


Spot 120 Dali Version



designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

● 03.6286.40.DA - 430lm	White
● 03.6286.14.DA - 430lm	Black



CERTIFICATIONS

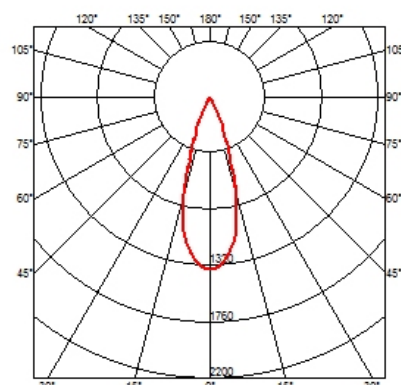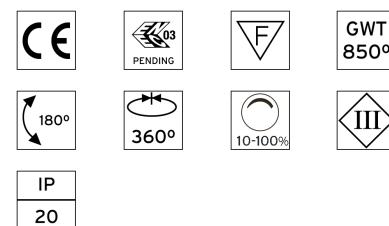

Spot 120 Dali Version . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Spot 120 Dali Version designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

- 03.6286.40.DA - 430lm White
- 03.6286.14.DA - 430lm Black



CERTIFICATIONS

