

## STRING LIGHT SPHERE DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Power LED 16W 1310 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	24
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	178°

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Width (mm)</b>	190
<b>Construction material</b>	Aluminium or Polycarbonate
<b>Weight (kg)</b>	1,27





**String Light Sphere Dali Version**  
designed by FLOS Architectural

General lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

● 03.6295.14.DA - 780lm Black



### CERTIFICATIONS

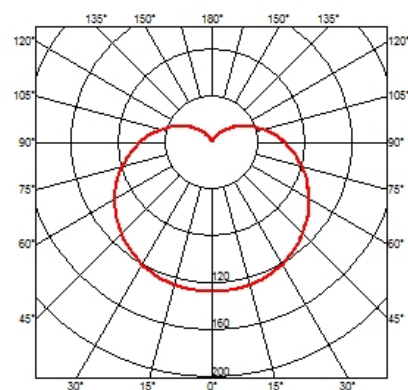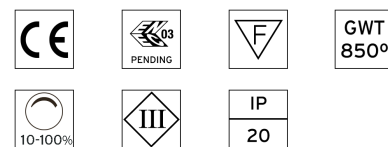

## String Light Sphere Dali Version . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED



**String Light Sphere Dali Version**  
designed by FLOS Architectural

General lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

● 03.6295.14.DA - 780lm Black



**CERTIFICATIONS**

