

SPOT MODULE DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED 8W 560 lm 2700K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	Maximum 14 spots for a single driver. Maximum 64 spots for a single DALI controller. Running Magnet 2.0 luminaires are not compatible with Running Magnet 1.0.



OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	14° Spot

Spot Module Dali Version designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III



● 03.6303.14ADA - 403lm Black

PHYSICAL

Spot diameter (mm)	34
Weight (kg)	0,19

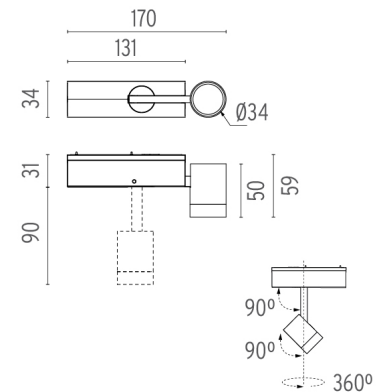

CERTIFICATIONS

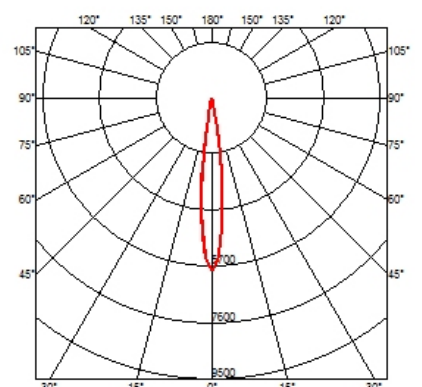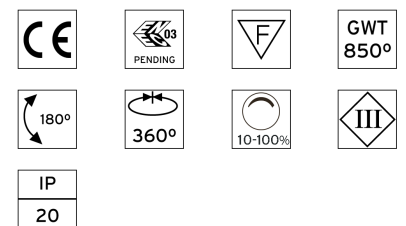

Spot Module Dali Version . Accessories

Optical



08.8760.00

Frosted medium lens

Flood lens accessory. Spot Module 20,6° / Multi Spot 21°



08.8761.00


Frosted medium lens

Wide Flood lens accessory. Spot Module 30,6° / Multi Spot 28°



08.8759.00

Elliptical Lens



08.8427.14

Screening external ring for Running Magnet 2.0 spot module


Screening external ring for Running Magnet 2.0 spot module in aluminium with a black finish to enhance the visual comfort.





Spot Module Dali Version designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

03.6303.14ADA - 403lm Black

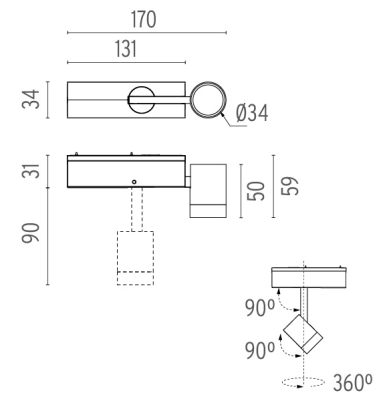

CERTIFICATIONS

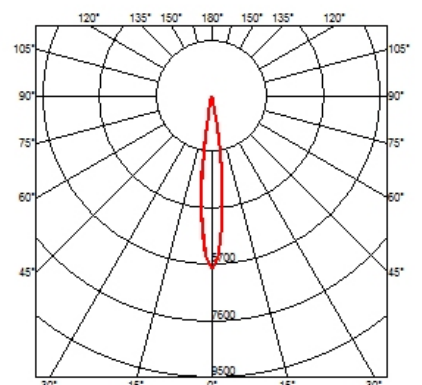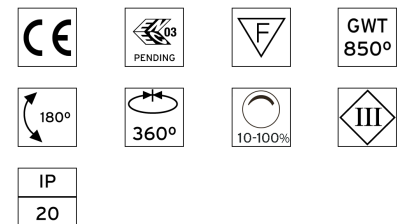

Spot Module Dali Version . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Spot Module Dali Version
designed by FLOS Architectural

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter.

● 03.6303.14ADA - 403lm Black

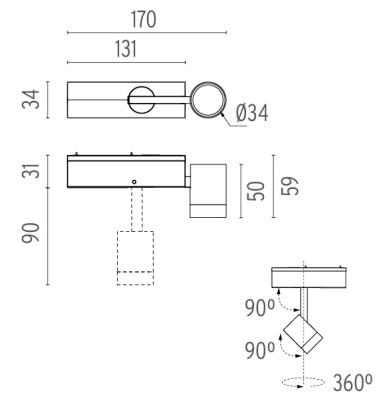

CERTIFICATIONS

