

LIGHT TUBE INDIRECT 1200 MM

| | |
|--------------------------------|---|
| Number of heads | 1 |
| Mounting | Track mounting |
| Lamps description | Top LED 25W/m 2328 lm 3000K CRI 90 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 48 |
| Environment | Indoor |
| Notes | Turning fastening elements 0°-90° with a magnetic connection and mechanic security bock for a transversally installation between two lines of the profile. The Light Tube are only fed by one of the ends and do not communicate current through the other end. |



OPTICAL

| | |
|------------------------------------|-----------|
| Aiming | Fixed |
| Light distribution symmetry | Symmetric |
| Beam angle | 102° |

Light Tube Indirect 1200 mm designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.



ELECTRICAL

| | |
|---------------------------------|---------------------|
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Transformer type | Electronic dimmable |
| Emergency | Without |

| | | |
|---|---------------------|-------|
| ● | 03.6389.14 - 1798lm | Black |
| ● | 03.6389.40 - 1798lm | White |

PHYSICAL

| | |
|--------------------|------|
| Length (mm) | 1200 |
|--------------------|------|

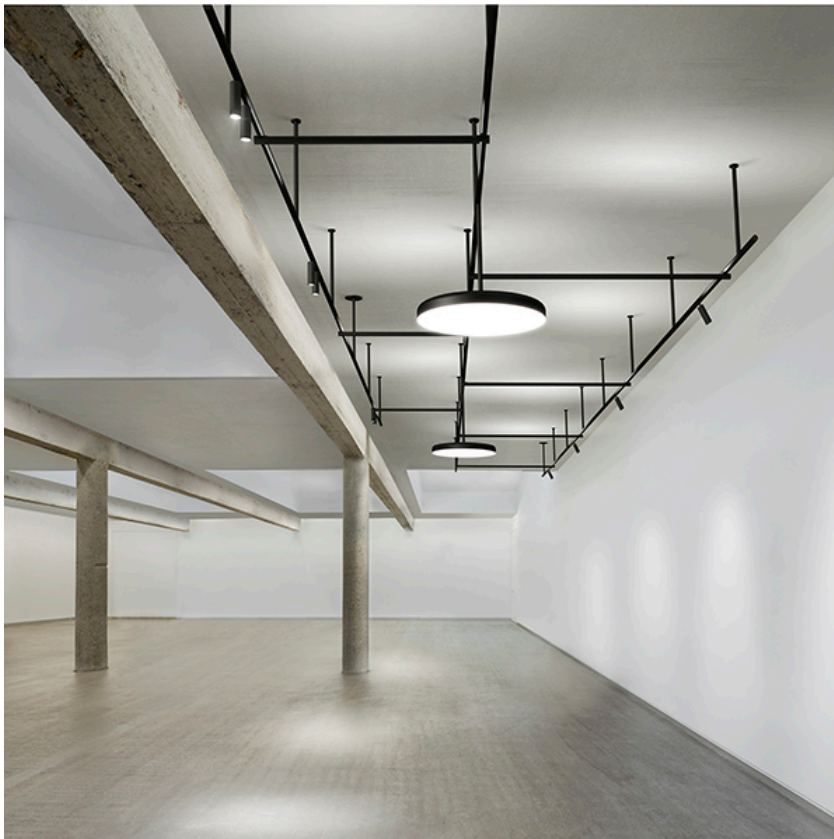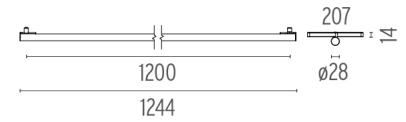

CERTIFICATIONS



Light Tube Indirect 1200 mm . Lamps




Top LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Top LED



Light Tube Indirect 1200 mm
designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

-
- | | | |
|---|---------------------|-------|
| ● | 03.6389.14 - 1798lm | Black |
| ● | 03.6389.40 - 1798lm | White |
-



CERTIFICATIONS

