

# FLOS

## SPOT TRACKING 90

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Power LED 9,6W 900 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	24
<b>Environment</b>	Indoor
<b>Notes</b>	Maximum 13 spots for a single driver. Ask FLOS for other combinations. Accessories included (honeycomb and screening crosspiece).



### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	26° Medium

### Spot Tracking 90 designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet System.</div>


### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III


● 03.6410.40A - 586lm	White
● 03.6410.05A - 586lm	Chrome
● 03.6410.14A - 586lm	Black

### PHYSICAL

<b>Width (mm)</b>	185
<b>Spot diameter (mm)</b>	35
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,18



### CERTIFICATIONS

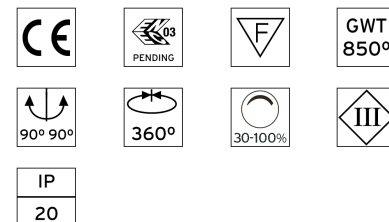

## Spot Tracking 90 . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED



**Spot Tracking 90**  
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet System.</div>

- 03.6410.40A - 586lm      White
- 03.6410.05A - 586lm      Chrome
- 03.6410.14A - 586lm      Black



**CERTIFICATIONS**

