

## EASY SPOT TRACKING

|                          |                                                                                                                         |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Number of heads</b>   | 1                                                                                                                       |
| <b>Mounting</b>          | Track mounting                                                                                                          |
| <b>Lamps description</b> | LED QR-CBC 51 GX5.3 Max 8W 12V                                                                                          |
| <b>Voltage (V)</b>       | 24                                                                                                                      |
| <b>Environment</b>       | Indoor                                                                                                                  |
| <b>Notes</b>             | Only compatible with FLOS lamps. Maximum of 17 non-dimmable spots for a single driver. Ask FLOS for other combinations. |



## OPTICAL

|                                    |            |
|------------------------------------|------------|
| <b>Reflector finish</b>            | Aluminum   |
| <b>Aiming</b>                      | Adjustable |
| <b>Light distribution symmetry</b> | Symmetric  |

## Easy Spot Tracking designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet System.</div>


## ELECTRICAL

|                                 |               |
|---------------------------------|---------------|
| <b>Transformer availability</b> | Separate item |
| <b>Transformer mounting</b>     | Remote        |
| <b>Transformer type</b>         | Electronic    |
| <b>Emergency</b>                | Without       |
| <b>Insulation class</b>         | Class III     |


|            |        |
|------------|--------|
| 03.6414.40 | White  |
| 03.6414.05 | Chrome |
| 03.6414.14 | Black  |

## PHYSICAL

|                              |           |
|------------------------------|-----------|
| <b>Width (mm)</b>            | 185       |
| <b>Spot diameter (mm)</b>    | 57        |
| <b>Construction material</b> | Aluminium |
| <b>Weight (kg)</b>           | 0,18      |



## CERTIFICATIONS

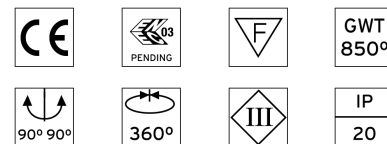

## Easy Spot Tracking . Lamps



60.6891

### LED QR-CBC 51

**Lamp Watt:**

8 W

**Lamp category:**

LED

**Socket:**

GX5.3

**Lamp angle:**

24 °

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6891

**Lamp type:**

LED QR-CBC 51



60.6992

### LED QR-CBC 51

**Lamp Watt:**

6,5 W

**Lamp category:**

LED

**Socket:**

GX5.3

**Lamp angle:**

36 °

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6992

**Lamp type:**

LED QR-CBC 51



60.6990

### LED QR-CBC 51

**Lamp Watt:**

6,5 W

**Lamp category:**

LED

**Socket:**

GX5.3

**Lamp angle:**

24 °

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6990

**Lamp type:**

LED QR-CBC 51




### Easy Spot Tracking

designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet System.</div>

|            |        |
|------------|--------|
| 03.6414.40 | White  |
| 03.6414.05 | Chrome |
| 03.6414.14 | Black  |



### CERTIFICATIONS

