

SPOT TRACKING 50

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED 4,2W 410 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	24
Environment	Indoor
Notes	Maximum 24 spots for a single driver. Ask FLOS for other combinations. Accessories included (honeycomb and screening crosspiece).



OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	28° Medium

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class III


PHYSICAL

Width (mm)	185
Spot diameter (mm)	35
Construction material	Aluminium
Weight (kg)	0,05


Spot Tracking 50 designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet System.</div>

● 03.6441.40 - 186lm	White
● 03.6441.05 - 186lm	Chrome
● 03.6441.14 - 186lm	Black



CERTIFICATIONS

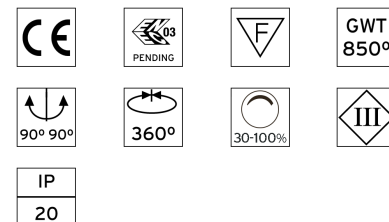

Spot Tracking 50 . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Spot Tracking 50 designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet System.</div>

03.6441.40 - 186lm	White
03.6441.05 - 186lm	Chrome
03.6441.14 - 186lm	Black



CERTIFICATIONS

