

#### LIGHT SHOOTER FIXED TRIM DIMMABLE

Number of heads

**Mounting** Ceiling recessed

Lamps descriptionPower LED 10W 910 Im 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

**Notes** LED: All the models include an accessory for IP54.

#### **OPTICAL**

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 12° Spot

#### **ELECTRICAL**

Transformer availability Included Transformer mounting Remote


Transformer type Electronic, Electronic dimmable, Electronic dimmable

I-10V, Electronic dimmable dali

Emergency Without Insulation class Class II

### **PHYSICAL**

Cutout diameter (mm)102Recessed depth (mm)160Construction materialAluminiumWeight (kg)0,45

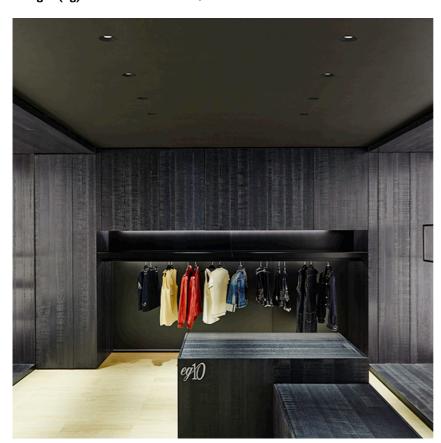





**Light Shooter Fixed Trim Dimmable** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6506.40.ADA - 343lm White 03.6506.14.ADA - 343lm Black





## **CERTIFICATIONS**
















Flos.architectural@flos.com www.flos.com



# **Light Shooter Fixed Trim Dimmable . Accessories**

### **Optical**





08.8041.68

# Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.

08.8412.14

#### Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.

# **Light Shooter Fixed Trim Dimmable. Lamps**



**Power LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:


Power LED



**Light Shooter Fixed Trim Dimmable** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6506.40.ADA - 343lm White 03.6506.14.ADA - 343lm Black



#### **CERTIFICATIONS**
















Flos.architectural@flos.com www.flos.com