

### **LIGHT SHOOTER WALL-WASHER TRIM**

Number of heads

**Mounting** Ceiling recessed

Lamps descriptionPower LED 10W 850 Im 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240
Environment Indoor

**Notes** LED: All the models include an accessory for IP54.

#### **OPTICAL**

Aiming Fixed

Light distribution symmetry Asymmetric


Beam angle 34°

#### **ELECTRICAL**

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

#### **PHYSICAL**

Cutout diameter (mm)102Recessed depth (mm)160Construction materialAluminiumWeight (kg)0,45

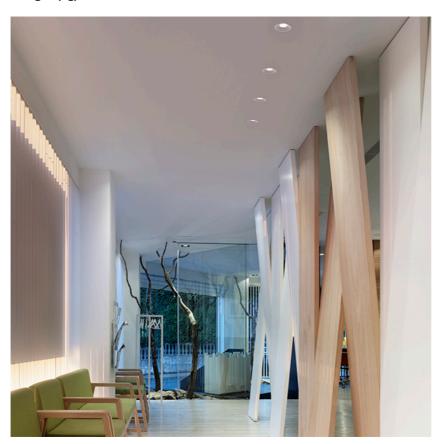





**Light Shooter Wall-Washer Trim** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6514.40A - 401Im White
03.6514.14A - 401Im Black





# **CERTIFICATIONS**
















Flos.architectural@flos.com www.flos.com



# Light Shooter Wall-Washer Trim . Accessories

## **Optical**





08.8041.68

# Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.

08.8412.14

#### Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.

# Light Shooter Wall-Washer Trim . Lamps



**Power LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:


Power LED



**Light Shooter Wall-Washer Trim** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6514.40A - 401lm White
03.6514.14A - 401lm Black



#### **CERTIFICATIONS**














Flos.architectural@flos.com www.flos.com