

#### **LIGHT SHOOTER FIXED NO TRIM**

Number of heads

**Mounting** Ceiling recessed

Lamps descriptionPower LED 10W 910 Im 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

Notes LED: All the models include an accessory for IP54. Pre-

installation frame included in No Trim versions.

#### **OPTICAL**


Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 12° Spot

#### **ELECTRICAL**

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

#### **PHYSICAL**

Cutout diameter (mm)105Recessed depth (mm)160Construction materialAluminiumWeight (kg)0,45

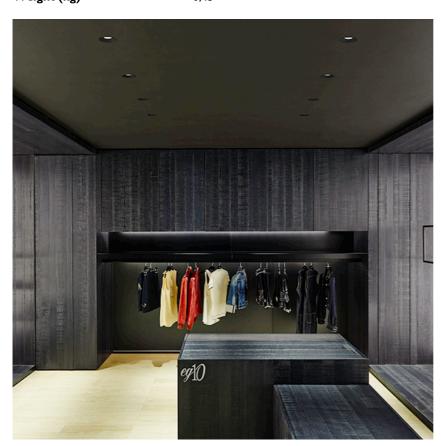




**Light Shooter Fixed No Trim** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6526.40A - 343Im White
03.6526.14A - 343Im Black





## **CERTIFICATIONS**





ΙP







Flos.architectural@flos.com www.flos.com



# **Light Shooter Fixed No Trim. Accessories**

#### **Optical**





08.8041.68

# Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.

08.8412.14

#### Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.

# **Light Shooter Fixed No Trim . Lamps**



**Power LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




**Light Shooter Fixed No Trim** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6526.40A - 343Im White
03.6526.14A - 343Im Black





## **CERTIFICATIONS**













Flos.architectural@flos.com www.flos.com