

LIGHT SHOOTER FIXED NO TRIM DIMMABLE

Number of heads

Mounting Ceiling recessed

Lamps descriptionPower LED 10W 850 lm 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

Notes LED: All the models include an accessory for IP54. Pre-

installation frame included in No Trim versions.

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 25° Flood

ELECTRICAL

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic, Electronic dimmable, Electronic dimmable

I-10V, Electronic dimmable dali


Emergency Without

Insulation class Class II

PHYSICAL

Cutout diameter (mm) 105
Recessed depth (mm) 160

Construction material Aluminium Weight (kg) 0,45

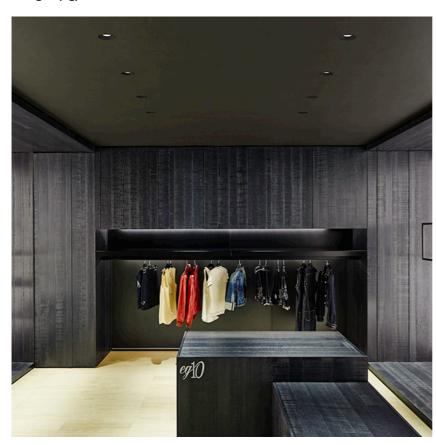




Light Shooter Fixed No Trim Dimmable designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6530.40.ADA - 543lm White 03.6530.14.ADA - 543lm Black





CERTIFICATIONS
















Flos.architectural@flos.com www.flos.com



Light Shooter Fixed No Trim Dimmable . Accessories

Optical





08.8041.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.

08.8412.14

Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.

Light Shooter Fixed No Trim Dimmable . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shooter Fixed No Trim Dimmable designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6530.40.ADA - 543lm White
03.6530.14.ADA - 543lm Black





CERTIFICATIONS
















Flos.architectural@flos.com www.flos.com