

LIGHT SHOOTER HP ADJUSTABLE NO TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED 11W 1060 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	LED: All the models include an accessory for IP54. Pre-installation frame included in No Trim versions.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	14° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Cutout diameter (mm)	105
Recessed depth (mm)	170
Construction material	Aluminium
Weight (kg)	0,45




Light Shooter HP Adjustable No Trim Dimmable




designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

- 03.6570.40.ADA - 453lm White
- 03.6570.14.ADA - 453lm Black

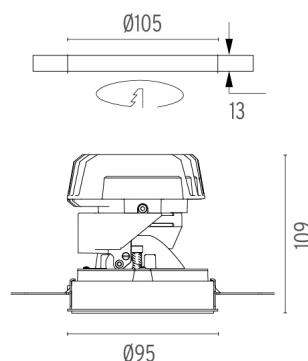

CERTIFICATIONS

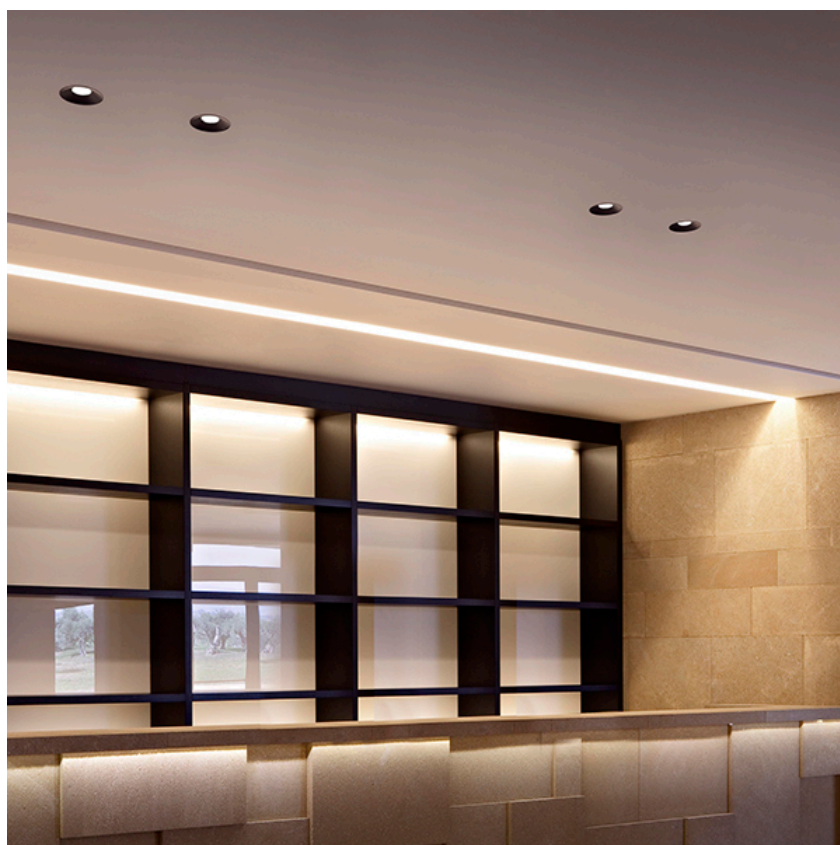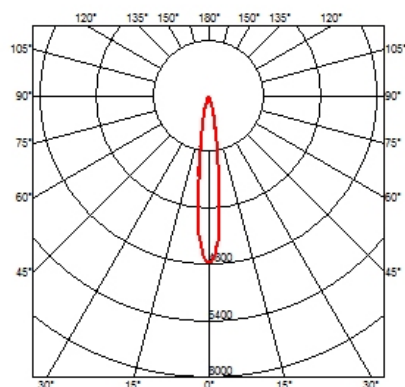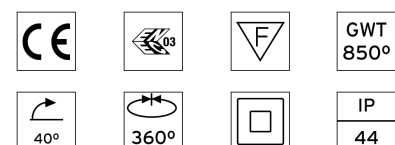

Light Shooter HP Adjustable No Trim Dimmable . Accessories

Optical



08.8041.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



08.8412.14

Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



Light Shooter HP Adjustable No Trim Dimmable

designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6570.40.ADA - 453lm White

03.6570.14.ADA - 453lm Black

Light Shooter HP Adjustable No Trim Dimmable . Lamps



Power LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Power LED

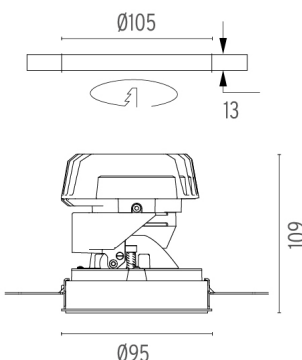

CERTIFICATIONS



GWT
850°



IP
44

