

LIGHT SHOOTER HP ADJUSTABLE NO TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED 11W 910 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	LED: All the models include an accessory for IP54. Pre-installation frame included in No Trim versions.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	29° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Cutout diameter (mm)	105
Recessed depth (mm)	170
Construction material	Aluminium
Weight (kg)	0,45




**Light Shooter HP Adjustable
No Trim Dimmable**




designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6573.40.DA - 592lm	White
03.6573.14.DA - 592lm	Black

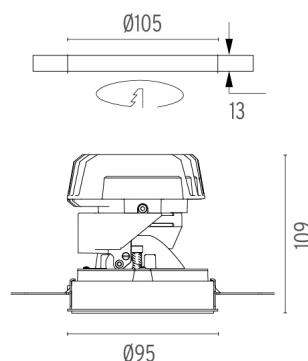

CERTIFICATIONS

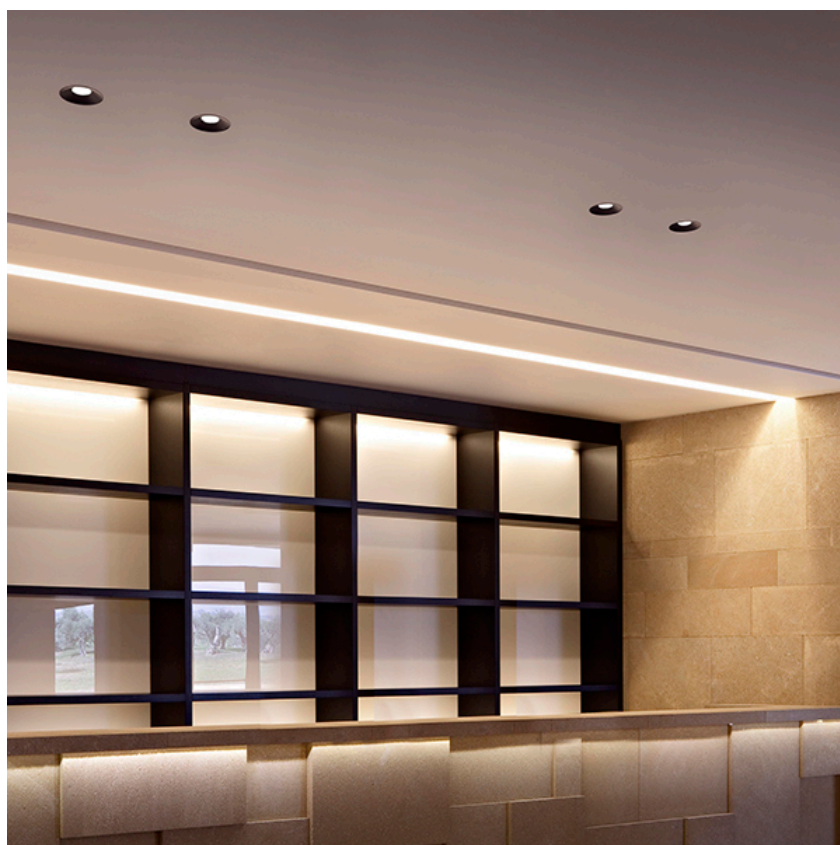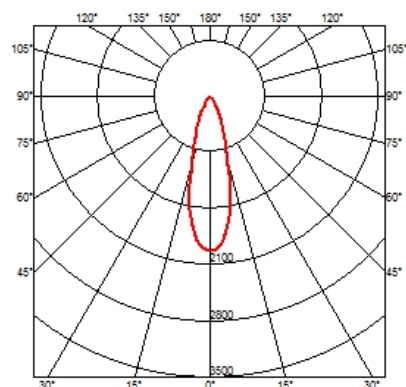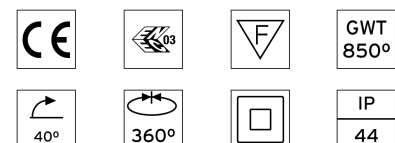

Light Shooter HP Adjustable No Trim Dimmable . Accessories

Optical



08.8041.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



08.8412.14

Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



Light Shooter HP Adjustable No Trim Dimmable

designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

- 03.6573.40.DA - 592lm White
- 03.6573.14.DA - 592lm Black

Light Shooter HP Adjustable No Trim Dimmable . Lamps



Power LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Power LED

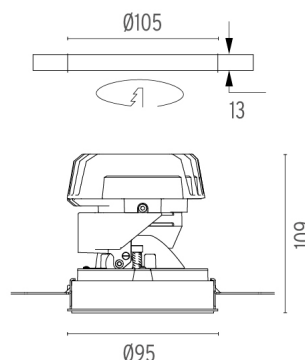

CERTIFICATIONS

