

EASY LIGHT SHOOTER ADJUSTABLE TRIM

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED QR-CBC 51 GX5.3 Max 10W
Voltage (V)	12
Environment	Indoor

OPTICAL


Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10°, 24°, 25°, 36°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Recessed depth (mm)	129
Construction material	Aluminium
Weight (kg)	0,26

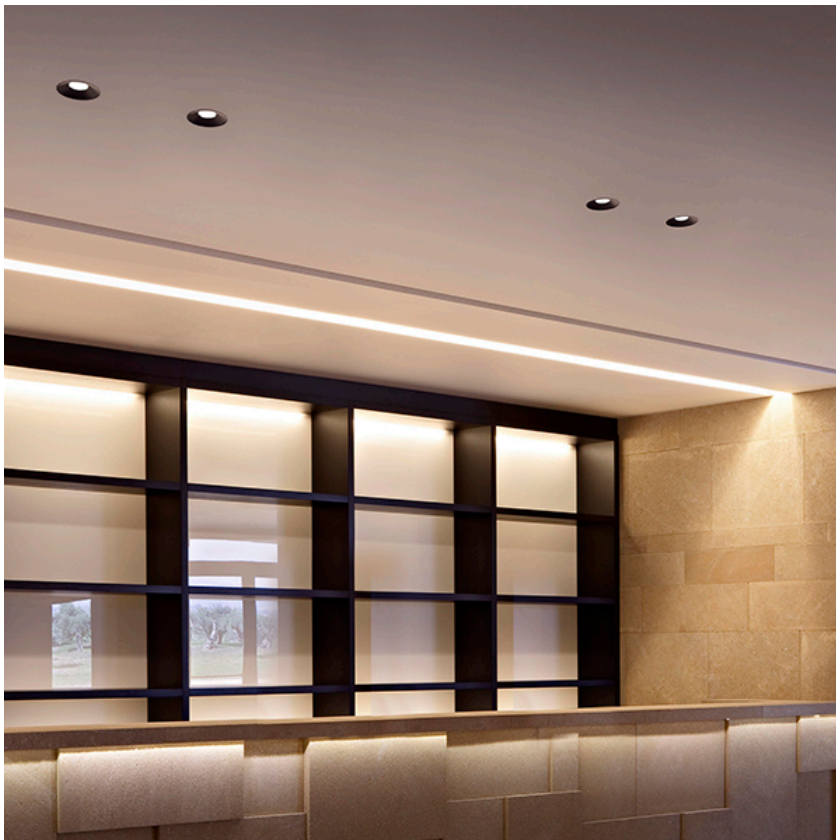


Easy Light Shooter Adjustable Trim
designed by FLOS Architectural

High performance recessed downlight. Remote transformer not included.

● 03.6580.40	White
● 03.6580.14	Black

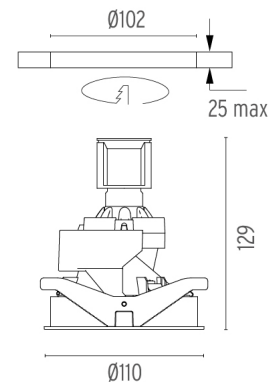


CERTIFICATIONS

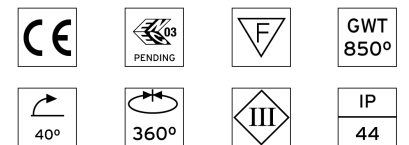

Easy Light Shooter Adjustable Trim . Accessories

Optical



08.8041.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



● 08.8412.14

Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



Easy Light Shooter Adjustable Trim
designed by FLOS Architectural

High performance recessed downlight. Remote transformer not included.

○ 03.6580.40 White
● 03.6580.14 Black

Easy Light Shooter Adjustable Trim . Lamps



60.6891

LED QR-CBC 5 I

Lamp Watt:
8 W

Lamp category:
LED

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6891

Lamp type:
LED QR-CBC 5 I



60.6992

LED QR-CBC 5 I

Lamp Watt:
6,5 W

Lamp category:
LED

Socket:
GX5.3

Lamp angle:
36 °

Color temperature (K):
3000 °K

Catalog reference:
60.6992

Lamp type:
LED QR-CBC 5 I



60.6990

LED QR-CBC 5 I

Lamp Watt:
6,5 W

Lamp category:
LED


Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6990

Lamp type:
LED QR-CBC 5 I

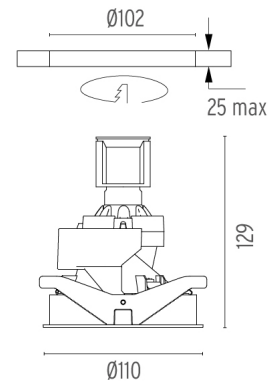

CERTIFICATIONS

