

## LIGHT SUPPLY ADJUSTABLE TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Phosphor LED 28W 3000 lm 4000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor

### OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

### ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class II

### PHYSICAL


Cutout diameter (mm)	156
Recessed depth (mm)	239
Construction material	Aluminium
Weight (kg)	1,01





Light Supply Adjustable Trim Dimmable designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

- 03.6605.40.DA - 1725lm White
- 03.6605.14.DA - 1725lm Black

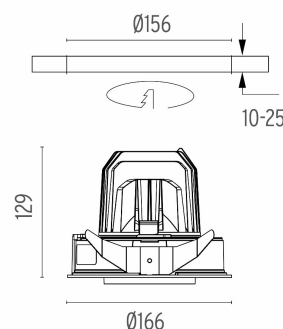

### CERTIFICATIONS

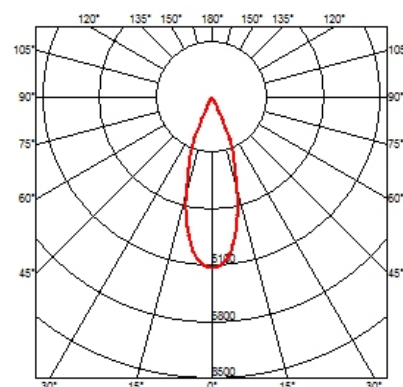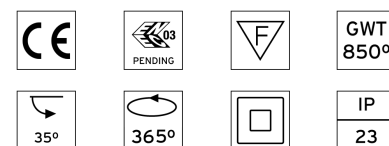

## Light Supply Adjustable Trim Dimmable . Accessories

### Optical



● 08.8049.14

**Honeycomb. Small Cells**



● 08.8377.14

**Honeycomb. Big Cells**



● 08.8242.14

**Screening crosspiece**



○ 08.8117.68

**Flood lens**



○ 08.8118.68

**Elliptical lens**



○ 08.8413.00

**Light Supply Adjustable  
spare reflector. Spot**



○ 08.8414.00

**Light Supply Adjustable  
spare reflector. Medium**



○ 08.8415.00

**Light Supply Adjustable  
spare reflector. Flood**





**Light Supply Adjustable Trim Dimmable**  
designed by FLOS Architectural


Recessed luminaire with integrated  
Phosphor LED light source. Remote  
220/240V driver included.

○ 03.6605.40.DA - 1725lm White

● 03.6605.14.DA - 1725lm Black

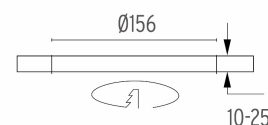

### CERTIFICATIONS

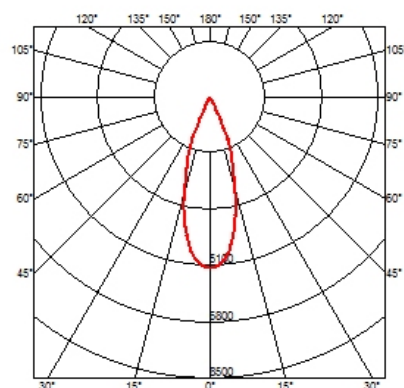

## Light Supply Adjustable Trim Dimmable . Lamps



### Phosphor LED

**Lamp category:**  
LED


**Lamp type:**  
Phosphor LED



**Light Supply Adjustable Trim Dimmable**  
designed by FLOS Architectural

Recessed luminaire with integrated  
Phosphor LED light source. Remote  
220/240V driver included.

- 03.6605.40.DA - 1725lm White
- 03.6605.14.DA - 1725lm Black

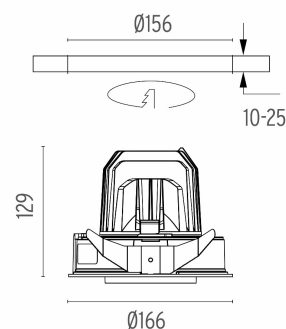

### CERTIFICATIONS

