

## LIGHT SUPPLY ADJUSTABLE TRIM DIMMABLE

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Phosphor LED 26W 2285 lm 3000K CRI 98
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	16° Spot

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	156
<b>Recessed depth (mm)</b>	239
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,01





Light Supply Adjustable Trim Dimmable designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

- 03.6606.40.DA - 1363lm White
- 03.6606.14.DA - 1363lm Black

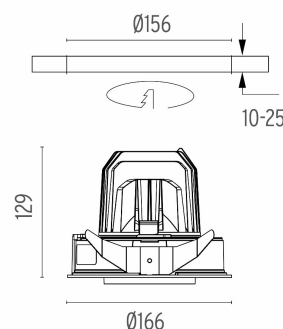

### CERTIFICATIONS

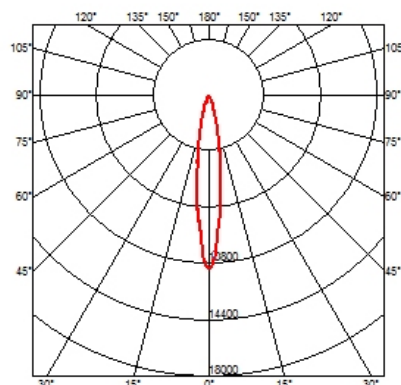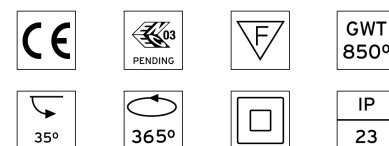

## Light Supply Adjustable Trim Dimmable . Accessories

### Optical



● 08.8049.14

**Honeycomb. Small Cells**



● 08.8377.14

**Honeycomb. Big Cells**



● 08.8242.14

**Screening crosspiece**



○ 08.8117.68

**Flood lens**



○ 08.8118.68

**Elliptical lens**



○ 08.8413.00

**Light Supply Adjustable  
spare reflector. Spot**



○ 08.8414.00

**Light Supply Adjustable  
spare reflector. Medium**



○ 08.8415.00

**Light Supply Adjustable  
spare reflector. Flood**





**Light Supply Adjustable Trim Dimmable**  
designed by FLOS Architectural


Recessed luminaire with integrated  
Phosphor LED light source. Remote  
220/240V driver included.

○ 03.6606.40.DA - 1363lm White

● 03.6606.14.DA - 1363lm Black

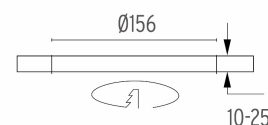

### CERTIFICATIONS

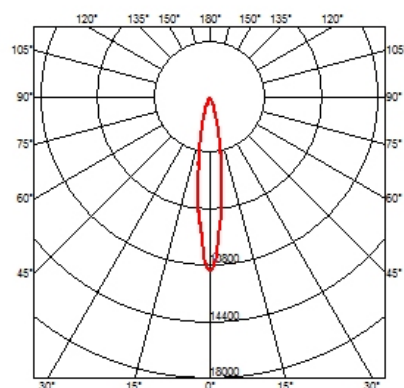

## Light Supply Adjustable Trim Dimmable . Lamps



### Phosphor LED

**Lamp category:**  
LED


**Lamp type:**  
Phosphor LED



**Light Supply Adjustable Trim Dimmable**  
designed by FLOS Architectural

Recessed luminaire with integrated  
Phosphor LED light source. Remote  
220/240V driver included.

- 03.6606.40.DA - 1363lm White
- 03.6606.14.DA - 1363lm Black

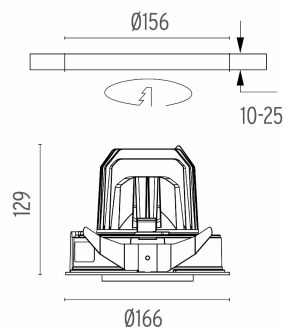

### CERTIFICATIONS

