

LIGHT SUPPLY ADJUSTABLE TRIM

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Phosphor LED 26W 2285 lm 3000K CRI 98
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	24° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	156
Recessed depth (mm)	239
Construction material	Aluminium
Weight (kg)	1,01



Light Supply Adjustable Trim
designed by FLOS Architectural


Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

● 03.6607.40 - 1297lm	White
● 03.6607.14 - 1297lm	Black



CERTIFICATIONS

CE	03 PENDING	F	GWT 850°
35°	365°	IP 23	



Light Supply Adjustable Trim . Accessories

Optical



● 08.8049.14

Honeycomb. Small Cells



● 08.8377.14

Honeycomb. Big Cells



● 08.8242.14

Screening crosspiece



Light Supply Adjustable Trim
designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

○ 03.6607.40 - 1297lm	White
● 03.6607.14 - 1297lm	Black



○ 08.8117.68

Flood lens





○ 08.8118.68

Elliptical lens



○ 08.8413.00

**Light Supply Adjustable
spare reflector. Spot**



○ 08.8414.00



**Light Supply Adjustable
spare reflector. Medium**



○ 08.8415.00

**Light Supply Adjustable
spare reflector. Flood**

CERTIFICATIONS

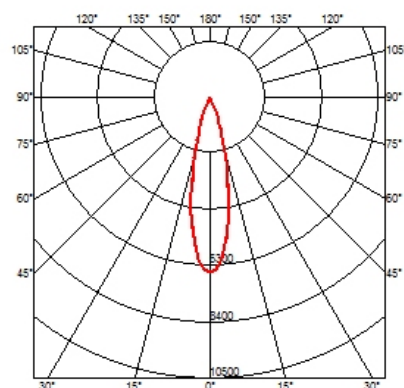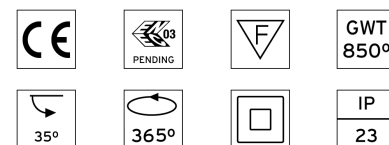

Light Supply Adjustable Trim . Lamps



Phosphor LED

Lamp category:
LED

Lamp type:
Phosphor LED




Light Supply Adjustable Trim

designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6607.40 - 1297lm	White
03.6607.14 - 1297lm	Black

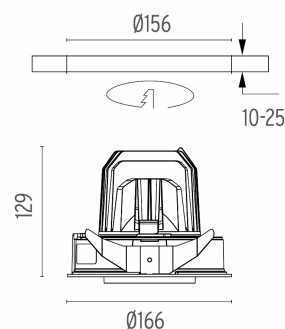

CERTIFICATIONS

