

## LIGHT SUPPLY FIXED TRIM DIMMABLE

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Phosphor LED 26W 2285 lm 3000K CRI 98
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	156
<b>Recessed depth (mm)</b>	277
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,98





**Light Supply Fixed Trim Dimmable**  
designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

- 03.6611.3B.DA - 65° - 1158lm White / White
- 03.6611.3C.DA - 48° - 1576lm White / Aluminium
- 03.6611.1B.DA - 65° - 1158lm Black / White
- 03.6611.1C.DA - 48° - 1576lm Black / Aluminium

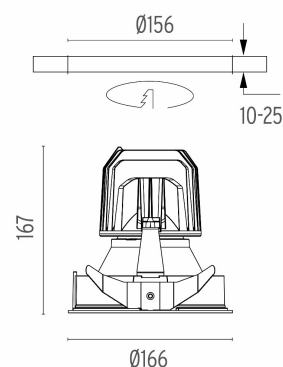

### CERTIFICATIONS

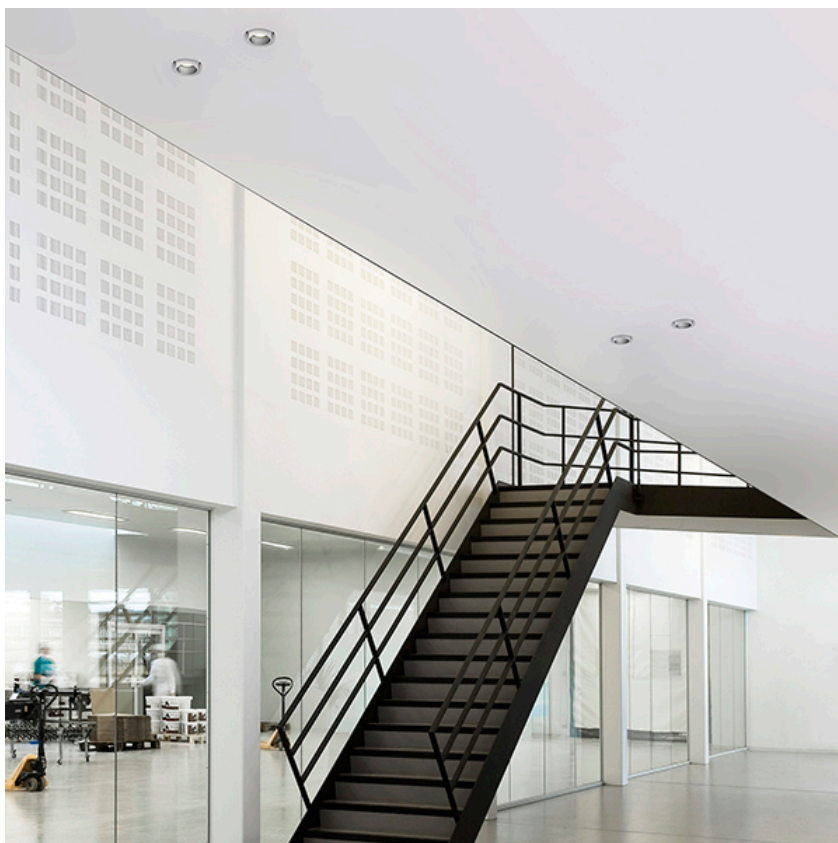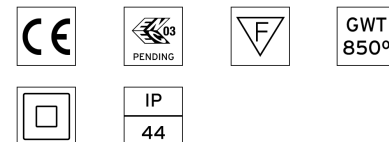

## Light Supply Fixed Trim Dimmable . Lamps



### Phosphor LED

**Lamp category:**  
LED


**Lamp type:**  
Phosphor LED



### Light Supply Fixed Trim Dimmable designed by FLOS Architectural

Recessed luminaire with integrated  
Phosphor LED light source. Remote  
220/240V driver included.

- 03.6611.3B.DA - 65° - 1158lm White / White
- ◐ 03.6611.3C.DA - 48° - 1576lm White / Aluminium
- ◑ 03.6611.1B.DA - 65° - 1158lm Black / White
- ◒ 03.6611.1C.DA - 48° - 1576lm Black / Aluminium

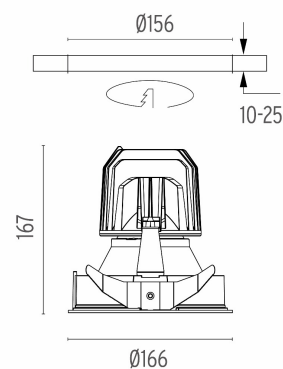

### CERTIFICATIONS

