

LIGHT SUPPLY ADJUSTABLE NO TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Phosphor LED 28W 3000 lm 3000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Pre-installation frame or Soft Architecture installation plate for No Trim installation. Have to be ordered separately.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Wide Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Cutout diameter (mm)	156
Recessed depth (mm)	239
Construction material	Aluminium
Weight (kg)	1,01




Light Supply Adjustable No Trim Dimmable



designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

- 03.6617.40.DA - 1725lm White
- 03.6617.14.DA - 1725lm Black

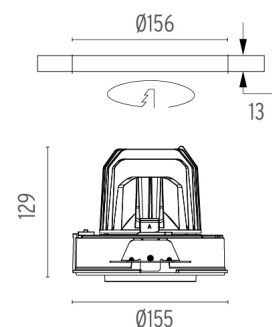

CERTIFICATIONS

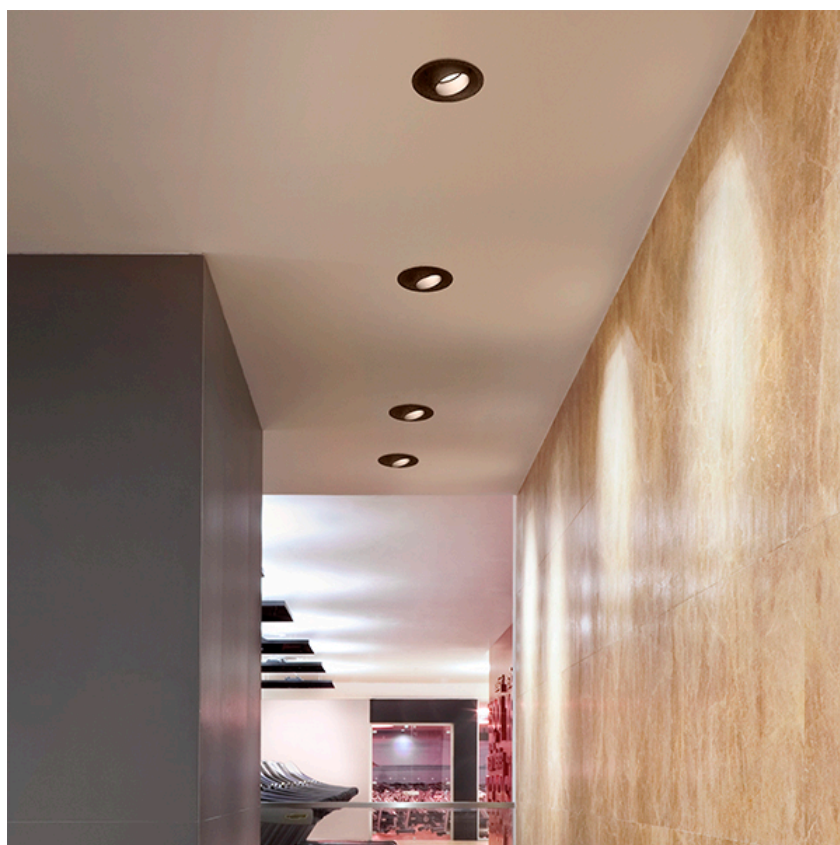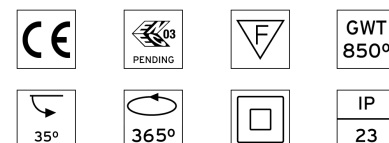

Light Supply Adjustable No Trim Dimmable . Accessories

Optical



● 08.8049.14

Honeycomb. Small Cells



● 08.8377.14

Honeycomb. Big Cells




● 08.8242.14

Screening crosspiece



○ 08.8117.68

Flood lens



○ 08.8118.68

Elliptical lens



○ 08.8413.00

**Light Supply Adjustable
spare reflector. Spot**



○ 08.8414.00

**Light Supply Adjustable
spare reflector. Medium**



○ 08.8415.00

**Light Supply Adjustable
spare reflector. Flood**




**Light Supply Adjustable No
Trim Dimmable**

designed by FLOS Architectural

Recessed luminaire with integrated
Phosphor LED light source. Remote
220/240V driver included.

○ 03.6617.40.DA - 1725lm White

● 03.6617.14.DA - 1725lm Black

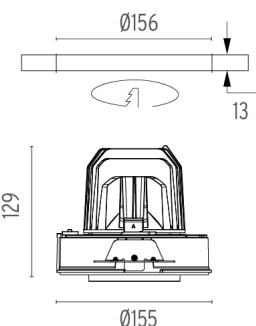

CERTIFICATIONS



GWT
850°



IP
23

Light Supply Adjustable No Trim Dimmable . Accessories

Mounting



08.8119.00

Pre-installation frame

Pre-installation frame.



SA.6600.1

Soft Architecture installation plate

Soft Architecture installation plate for integration in plasterboard.



Light Supply Adjustable No Trim Dimmable

designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6617.40.DA - 1725lm White

03.6617.14.DA - 1725lm Black


Light Supply Adjustable No Trim Dimmable . Lamps



Phosphor LED

Lamp category:
LED

Lamp type:
Phosphor LED

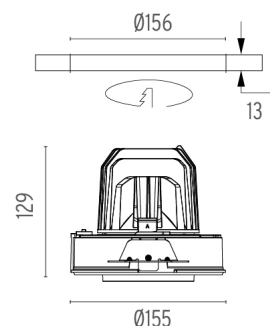

CERTIFICATIONS

