

## LIGHT SUPPLY ADJUSTABLE NO TRIM DIMMABLE

<b>Number of heads</b>	I
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Phosphor LED 28W 3000 lm 4000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame or Soft Architecture installation plate for No Trim installation. Have to be ordered separately.

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Cutout diameter (mm)</b>	156
<b>Recessed depth (mm)</b>	239
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,01




### Light Supply Adjustable No Trim Dimmable



designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

- 03.6620.40.DA - 1725lm White
- 03.6620.14.DA - 1725lm Black

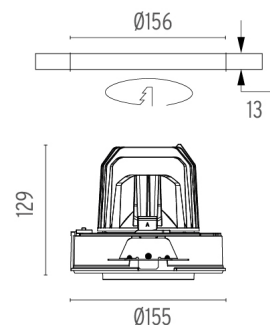

### CERTIFICATIONS

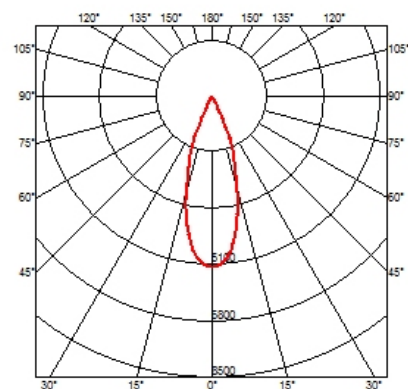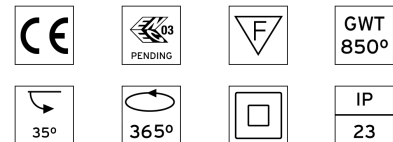

## Light Supply Adjustable No Trim Dimmable . Accessories

### Optical



● 08.8049.14

**Honeycomb. Small Cells**



● 08.8377.14

**Honeycomb. Big Cells**




● 08.8242.14

**Screening crosspiece**



○ 08.8117.68

**Flood lens**



○ 08.8118.68

**Elliptical lens**



○ 08.8413.00

**Light Supply Adjustable  
spare reflector. Spot**



○ 08.8414.00

**Light Supply Adjustable  
spare reflector. Medium**



○ 08.8415.00

**Light Supply Adjustable  
spare reflector. Flood**





**Light Supply Adjustable No  
Trim Dimmable**

designed by FLOS Architectural


Recessed luminaire with integrated  
Phosphor LED light source. Remote  
220/240V driver included.

○ 03.6620.40.DA - 1725lm White

● 03.6620.14.DA - 1725lm Black

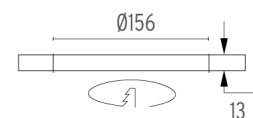

### CERTIFICATIONS

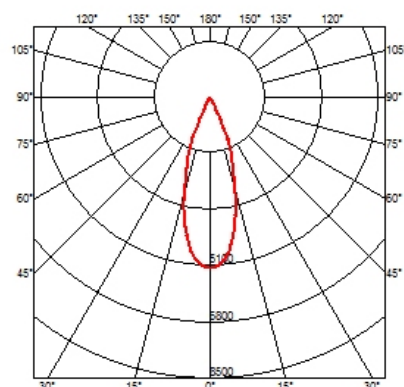

## Light Supply Adjustable No Trim Dimmable . Accessories


### Mounting



○ 08.8119.00

#### Pre-installation frame

Pre-installation frame.



○ SA.6600.1

#### Soft Architecture installation plate

Soft Architecture installation plate for integration in plasterboard.



#### Light Supply Adjustable No Trim Dimmable

designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

○ 03.6620.40.DA - 1725lm White

● 03.6620.14.DA - 1725lm Black


## Light Supply Adjustable No Trim Dimmable . Lamps



#### Phosphor LED

Lamp category:  
LED

Lamp type:  
Phosphor LED

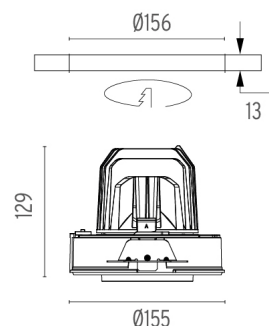

### CERTIFICATIONS



GWT  
850°



IP  
23

