

LIGHT SUPPLY ADJUSTABLE NO TRIM DIMMABLE

Number of heads

Mounting Ceiling recessed

Lamps description Phosphor LED 26W 2285 lm 3000K CRI 98 Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 220/240 **Environment** Indoor

Notes Pre-installation frame or Soft Architecture installation plate

for No Trim installation. Have to be ordered separately.

OPTICAL

Aiming Adjustable Light distribution symmetry Symmetric 24° Medium Beam angle

ELECTRICAL


Transformer availability Included **Transformer mounting** Remote

Electronic dimmable I-10V, Electronic dimmable dali Transformer type

Without **Emergency Insulation class** Class II

PHYSICAL

Cutout diameter (mm) 156 Recessed depth (mm) 239 **Construction material** Aluminium Weight (kg) 1,01

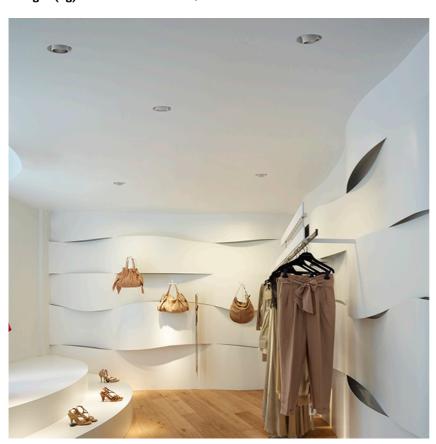





Light Supply Adjustable No Trim Dimmable

designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6622.40.DA - I297lm White 03.6622.14.DA - 1297lm Black





CERTIFICATIONS




















Flos.architectural@flos.com www.flos.com



Light Supply Adjustable No Trim Dimmable . Accessories

Optical









08.8049.14

08.8377.14

designed by FLOS Architectural

Honeycomb. Small Cells

Honeycomb. Big Cells

08.8242.14 Screening crosspiece

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.







03.6622.40.DA - I297lm White 03.6622.14.DA - 1297lm Black










08.8117.68

08.8118.68

08.8413.00



Flood lens

Elliptical lens

Light Supply Adjustable spare reflector. Spot













GWT 850°

08.8414.00

08.8415.00






ΙP 23

Light Supply Adjustable spare reflector. Medium

Light Supply Adjustable spare reflector. Flood



Flos.architectural@flos.com www.flos.com



Light Supply Adjustable No Trim Dimmable . Accessories

Mounting





08.8119.00

SA.6600.1

Pre-installation frame

Soft Architecture installation plate

Pre-installation frame.

Soft Architecture installation plate for integration in plasterboard.



Light Supply Adjustable No Trim Dimmable

designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6622.40.DA - 1297lm White
03.6622.14.DA - 1297lm Black


Light Supply Adjustable No Trim Dimmable . Lamps



Phosphor LED
Lamp category:
LED

Lamp type:

Phosphor LED



Ø155

CERTIFICATIONS




















Flos.architectural@flos.com www.flos.com