FLOS

LIGHT SUPPLY FIXED NO TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Phosphor LED 26W 2285 Im 3000K CRI 98
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Pre-installation frame or Soft Architecture installation plate for No Trim installation. Have to be ordered separately.

Fixed

Symmetric

OPTICAL

Aiming Light distribution symmetry

ELECTRICAL


Transformer availability **Transformer mounting** Transformer type Emergency Insulation class

Included Remote Electronic dimmable 1-10V, Electronic dimmable dali Without Class II

PHYSICAL

Cutout diameter (mm) Recessed depth (mm) **Construction material** Weight (kg)

156 277 Aluminium 0,98

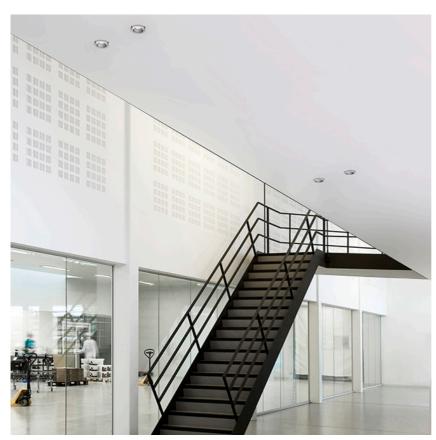




Light Supply Fixed No Trim Dimmable designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6626.40.DA - 65° - 1158lm White

03.6626.06.DA - 48° - 1576lm Aluminum



CERTIFICATIONS



GWT 850°

FLOS

Light Supply Fixed No Trim Dimmable . Accessories

Mounting



08.8359.00

Pre-installation frame

Pre-installation frame.

SA.6610.1 Soft Architecture installation plate Soft Architecture installation plate


for integration in plasterboard.




Light Supply Fixed No Trim Dimmable designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6626.40.DA - 65° - 1158lm White 03.6626.06.DA - 48° - 1576lm Aluminum





Light Supply Fixed No Trim Dimmable . Lamps



Phosphor LED Lamp category: LED Lamp type: Phosphor LED