

## **LIGHT SUPPLY WALL-WASHER NO TRIM**

**Number of heads** 

**Mounting** Ceiling recessed

Phosphor LED 28W 3000 Im 4000K CRI 80 Lamps description Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 220/240 **Environment** Indoor

Pre-installation frame or Soft Architecture installation plate for No Trim installation. Have to be ordered separately. Notes

**OPTICAL** 

**Aiming** Fixed Light distribution symmetry Asymmetric


**ELECTRICAL** 

Transformer availability Included Transformer mounting Remote Transformer type Electronic Without **Emergency Insulation class** Class II

#### **PHYSICAL**

Flos.architectural@flos.com

Cutout diameter (mm) 155 290 Recessed depth (mm) **Construction material** Aluminium Weight (kg) 1,01

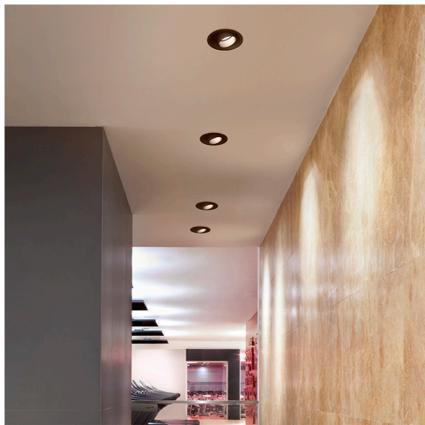




Light Supply Wall-Washer No Trim designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6628.40 - 38° - 1918lm White 03.6628.06 - 35° - 1967lm Aluminum



## **CERTIFICATIONS**





ΙP 44







www.flos.com



# Light Supply Wall-Washer No Trim . Accessories

### Mounting





08.8137.00

Pre-installation frame

Pre-installation frame.

SA.6615.1

**Soft Architecture** installation plate

Soft Architecture installation plate for integration in plasterboard.

# Light Supply Wall-Washer No Trim . Lamps



**Phosphor LED** Lamp category: LED

Lamp type:


Phosphor LED



Light Supply Wall-Washer No Trim designed by FLOS Architectural

Recessed luminaire with integrated Phosphor LED light source. Remote 220/240V driver included.

03.6628.40 - 38° - 1918lm White 03.6628.06 - 35° - 1967lm Aluminum



### **CERTIFICATIONS**







GWT

850°



Flos.architectural@flos.com www.flos.com