

LIGHT SUPPLY ADJUSTABLE TRIM

| | |
|--------------------------------|--|
| Number of heads | 1 |
| Mounting | Ceiling recessed |
| Lamps description | LED Array High Performances 30,1W 3402 lm 3000K CRI 80 |
| Luminaire luminous flux | Extreme Cut-off. See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |

OPTICAL

| | |
|------------------------------------|------------|
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 37° Flood |

ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL


| | |
|------------------------------|-----------|
| Cutout diameter (mm) | 156 |
| Recessed depth (mm) | 239 |
| Construction material | Aluminium |
| Weight (kg) | 1,01 |





Light Supply Adjustable Trim
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

| | | |
|---|----------------------|-------|
| ● | 03.6802.40A - 2250lm | White |
| ● | 03.6802.14A - 2250lm | Black |



CERTIFICATIONS

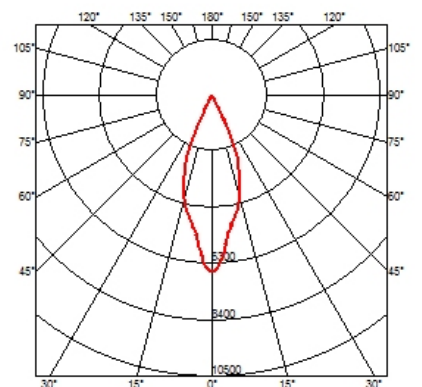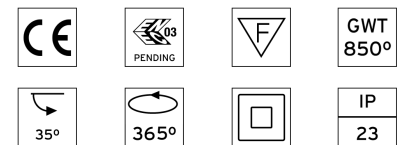

Light Supply Adjustable Trim . Accessories

Optical



● 08.8049.14
Honeycomb. Small Cells



● 08.8377.14
Honeycomb. Big Cells



● 08.8242.14
Screening crosspiece



○ 08.8117.68
Flood lens



○ 08.8118.68
Elliptical lens



○ 08.8450.00
Light Supply Adjustable spare reflector. Spot



○ 08.8451.00
Light Supply Adjustable spare reflector. Medium



○ 08.8452.00
Light Supply Adjustable spare reflector. Flood




● 08.8453.40
Highly-efficient cylinder





Light Supply Adjustable Trim
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6802.40A - 2250lm White
- 03.6802.14A - 2250lm Black



CERTIFICATIONS

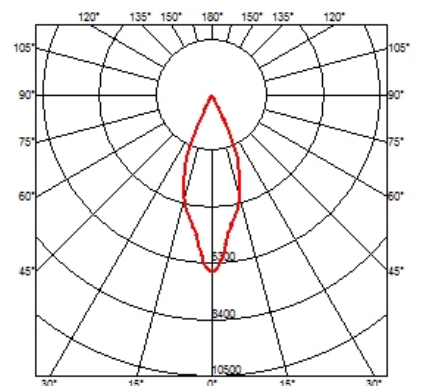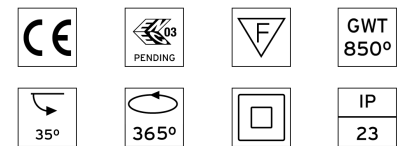

Light Supply Adjustable Trim . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Light Supply Adjustable Trim
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6802.40A - 2250lm White
- 03.6802.14A - 2250lm Black

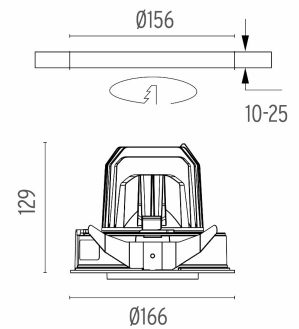

CERTIFICATIONS

