

## LIGHT SUPPLY ADJUSTABLE TRIM

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array High Performances 30,1W 2929 lm 4000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	23° Medium

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	156
<b>Recessed depth (mm)</b>	239
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,01





**Light Supply Adjustable Trim**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6804.40A - 1860lm White
- 03.6804.14A - 1860lm Black

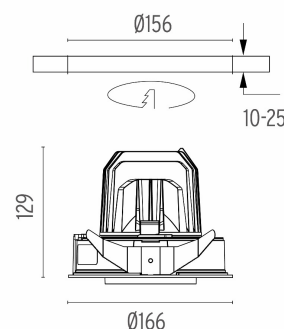

### CERTIFICATIONS

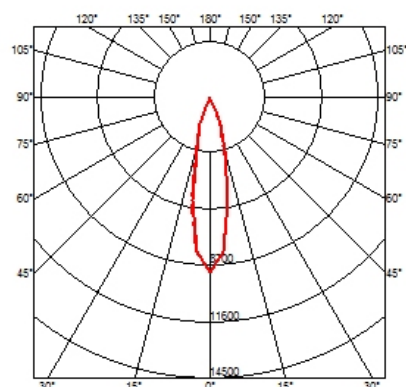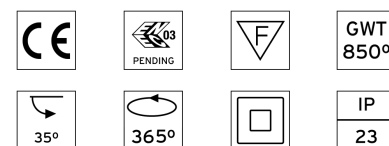

## Light Supply Adjustable Trim . Accessories

### Optical



● 08.8049.14  
**Honeycomb. Small Cells**



● 08.8377.14  
**Honeycomb. Big Cells**



● 08.8242.14  
**Screening crosspiece**



○ 08.8117.68  
**Flood lens**



○ 08.8118.68  
**Elliptical lens**



○ 08.8450.00  
**Light Supply Adjustable spare reflector. Spot**



○ 08.8451.00  
**Light Supply Adjustable spare reflector. Medium**



○ 08.8452.00  
**Light Supply Adjustable spare reflector. Flood**




● 08.8453.40  
**Highly-efficient cylinder**





**Light Supply Adjustable Trim**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6804.40A - 1860lm White
- 03.6804.14A - 1860lm Black

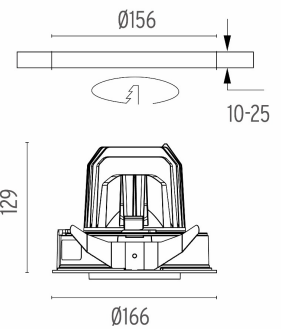

### CERTIFICATIONS

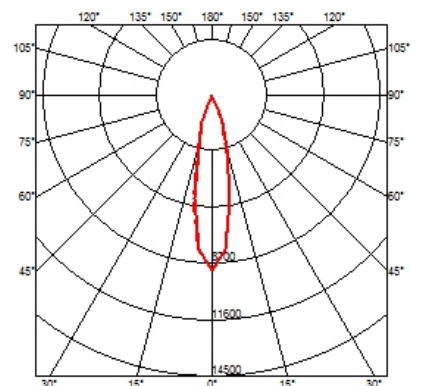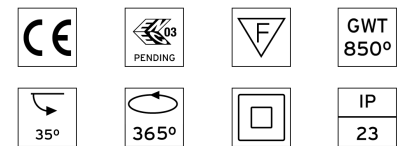

## Light Supply Adjustable Trim . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**


LED Array



**Light Supply Adjustable Trim**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6804.40A - 1860lm    White
- 03.6804.14A - 1860lm    Black

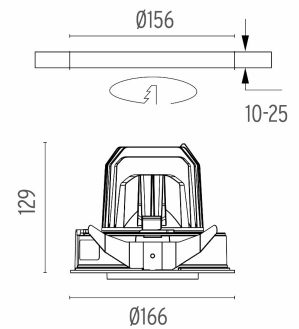

**CERTIFICATIONS**

