

# LIGHT SUPPLY ADJUSTABLE NO TRIM

Number of heads

Mounting Ceiling recessed

**Lamps description** LED Array High Performances 30,1W 3402 lm 3000K CRI 80

Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

Notes Pre-installation frame or Soft Architecture installation

plate for No Trim installation. To be ordered separately.

# **OPTICAL**


Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 13° Spot

#### **ELECTRICAL**

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

# **PHYSICAL**

Cutout diameter (mm)156Recessed depth (mm)239Construction materialAluminium

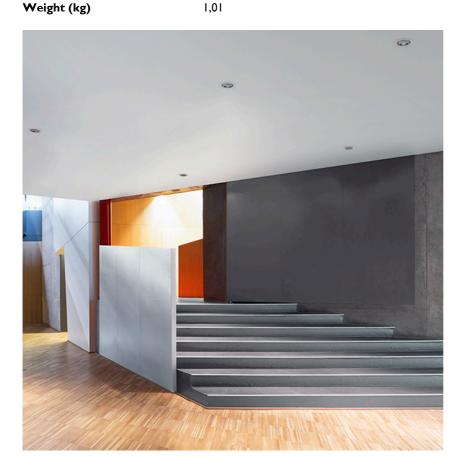




**Light Supply Adjustable No Trim** designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

03.6815.40A - 2314lm White 03.6815.14A - 2314lm Black



### **CERTIFICATIONS**















IP 23

Flos.architectural@flos.com www.flos.com



# Light Supply Adjustable No Trim . Accessories

#### **Optical**









08.8049.14

08.8377.14

08.8242.14

designed by FLOS Architectural Embedded luminaire for LED light source. Remote 220/240V power

supply included.

Honeycomb. Small Cells

Honeycomb. Big Cells

Screening crosspiece

03.6815.40A - 2314lm White 03.6815.14A - 2314lm Black










08.8117.68

Flood lens





Light Supply Adjustable spare reflector. Spot

























08.8451.00

Light Supply Adjustable spare reflector. Medium



08.8452.00

Light Supply Adjustable spare reflector. Flood

08.8453.40

Highly-efficient cylinder

Flos.architectural@flos.com www.flos.com



# Light Supply Adjustable No Trim . Accessories

# Mounting





08.8119.00

Pre-installation frame

Pre-installation frame.

SA.6600.1

Soft Architecture installation plate


Soft Architecture installation plate for integration in plasterboard.




**Light Supply Adjustable No Trim** designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

03.6815.40A - 2314lm White
03.6815.14A - 2314lm Black





# CERTIFICATIONS













GWT

850°

# Light Supply Adjustable No Trim . Lamps



**LED Array** 

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array

Flos.architectural@flos.com www.flos.com