

## LIGHT SUPPLY ADJUSTABLE NO TRIM

|                                |  |
|--------------------------------|--|
| <b>Number of heads</b>         | 1  |
| <b>Mounting</b>                | Ceiling recessed   |
| <b>Lamps description</b>       | LED Array High Performances 30,1W 2929 lm 4000K CRI 90   |
| <b>Luminaire luminous flux</b> | Extreme Cut-off. See reference number  |
| <b>Voltage (V)</b>             | 220/240  |
| <b>Environment</b>             | Indoor   |
| <b>Notes</b>                   | Pre-installation frame or Soft Architecture installation plate for No Trim installation. To be ordered separately. |

### OPTICAL

|                                    |            |
|------------------------------------|------------|
| <b>Aiming</b>                      | Adjustable |
| <b>Light distribution symmetry</b> | Symmetric  |
| <b>Beam angle</b>                  | 13° Spot   |

### ELECTRICAL

|                                 |            |
|---------------------------------|------------|
| <b>Transformer availability</b> | Included   |
| <b>Transformer mounting</b>     | Remote     |
| <b>Transformer type</b>         | Electronic |
| <b>Emergency</b>                | Without    |
| <b>Insulation class</b>         | Class II   |

### PHYSICAL


|                              |           |
|------------------------------|-----------|
| <b>Cutout diameter (mm)</b>  | 156       |
| <b>Recessed depth (mm)</b>   | 239       |
| <b>Construction material</b> | Aluminium |
| <b>Weight (kg)</b>           | 1,01      |




**Light Supply Adjustable No Trim**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6818.40A - 1992lm White
- 03.6818.14A - 1992lm Black

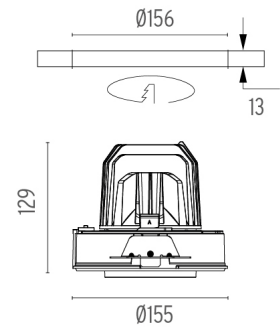

### CERTIFICATIONS

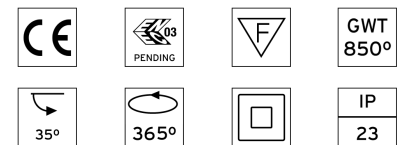

## Light Supply Adjustable No Trim . Accessories

### Optical



● 08.8049.14  
**Honeycomb. Small Cells**



● 08.8377.14  
**Honeycomb. Big Cells**



● 08.8242.14  
**Screening crosspiece**



○ 08.8117.68  
**Flood lens**



○ 08.8118.68  
**Elliptical lens**



○ 08.8450.00  
**Light Supply Adjustable spare reflector. Spot**



○ 08.8451.00  
**Light Supply Adjustable spare reflector. Medium**



○ 08.8452.00  
**Light Supply Adjustable spare reflector. Flood**




● 08.8453.40  
**Highly-efficient cylinder**




**Light Supply Adjustable No Trim**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6818.40A - 1992lm White
- 03.6818.14A - 1992lm Black

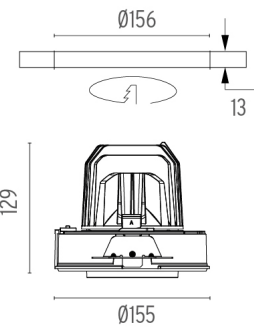

### CERTIFICATIONS

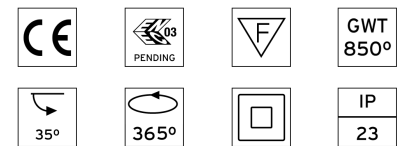

## Light Supply Adjustable No Trim . Accessories


### Mounting



○ 08.8119.00

#### Pre-installation frame

Pre-installation frame.



○ SA.6600.1

#### Soft Architecture installation plate

Soft Architecture installation plate for integration in plasterboard.



#### Light Supply Adjustable No Trim designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6818.40A - 1992lm    White
- 03.6818.14A - 1992lm    Black

## Light Supply Adjustable No Trim . Lamps



#### LED Array

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

LED Array

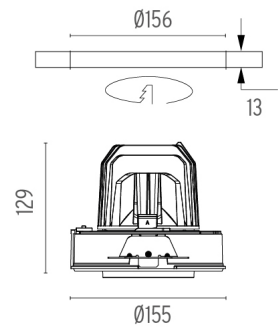

#### CERTIFICATIONS

