

## LIGHT SUPPLY ADJUSTABLE NO TRIM DIMMABLE

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array High Performances 30,1W 2929 lm 4000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame or Soft Architecture installation plate for No Trim installation. To be ordered separately.

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	13° Spot

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Cutout diameter (mm)</b>	156
<b>Recessed depth (mm)</b>	239
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,01





### Light Supply Adjustable No Trim Dimmable



designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6818.40ADA - 1992lm White
- 03.6818.14ADA - 1992lm Black

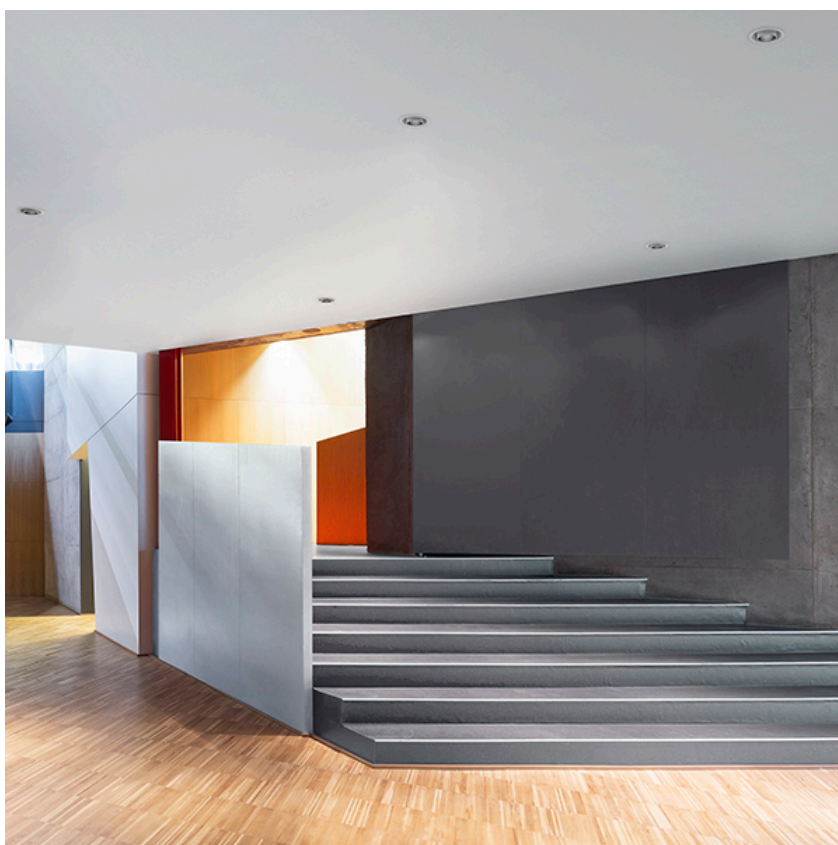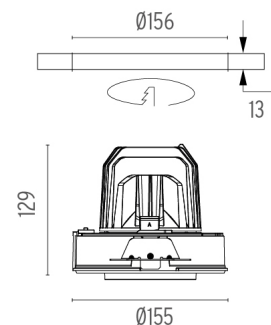

### CERTIFICATIONS

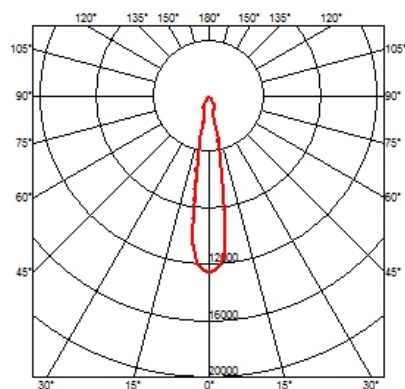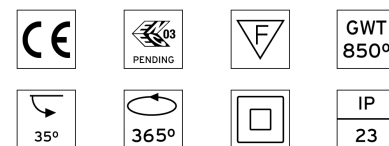

## Light Supply Adjustable No Trim Dimmable . Accessories

### Optical



● 08.8049.14  
**Honeycomb. Small Cells**



● 08.8377.14  
**Honeycomb. Big Cells**



● 08.8242.14  
**Screening crosspiece**



○ 08.8117.68  
**Flood lens**



○ 08.8118.68  
**Elliptical lens**



○ 08.8450.00  
**Light Supply Adjustable spare reflector. Spot**



○ 08.8451.00  
**Light Supply Adjustable spare reflector. Medium**



○ 08.8452.00  
**Light Supply Adjustable spare reflector. Flood**



● 08.8453.40  
**Highly-efficient cylinder**





**Light Supply Adjustable No Trim Dimmable**

designed by FLOS Architectural


Embedded luminaire for LED light source. Remote 220/240V power supply included.

○ 03.6818.40ADA - 1992lm White

● 03.6818.14ADA - 1992lm Black



### CERTIFICATIONS

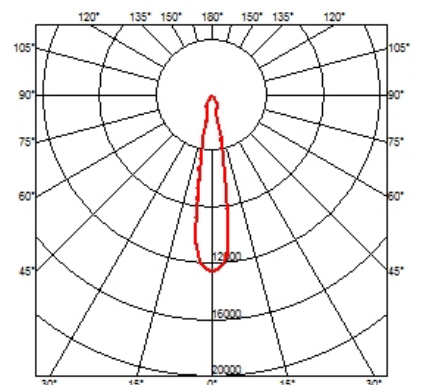

## Light Supply Adjustable No Trim Dimmable . Accessories


### Mounting



○ 08.8119.00

#### Pre-installation frame

Pre-installation frame.



○ SA.6600.1

#### Soft Architecture installation plate

Soft Architecture installation plate for integration in plasterboard.



#### Light Supply Adjustable No Trim Dimmable

designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

○ 03.6818.40ADA - 1992lm White

● 03.6818.14ADA - 1992lm Black

## Light Supply Adjustable No Trim Dimmable . Lamps



#### LED Array

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

LED Array



### CERTIFICATIONS

