

LIGHT SUPPLY ADJUSTABLE NO TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array High Performances 30,1W 2929 lm 4000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Pre-installation frame or Soft Architecture installation plate for No Trim installation. To be ordered separately.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	37° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Cutout diameter (mm)	156
Recessed depth (mm)	239
Construction material	Aluminium
Weight (kg)	1,01




Light Supply Adjustable No Trim Dimmable



designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6820.40ADA - 1937lm White
- 03.6820.14ADA - 1937lm Black

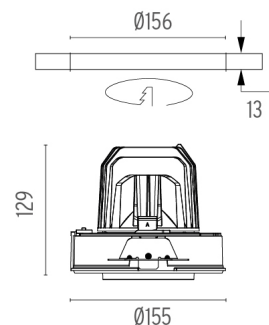

CERTIFICATIONS

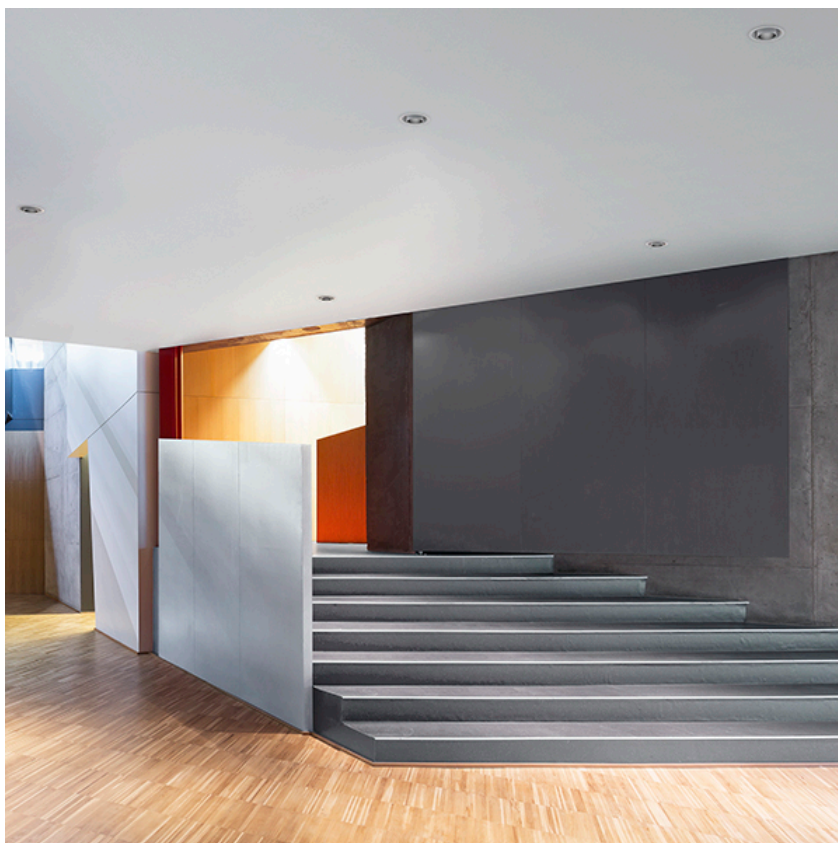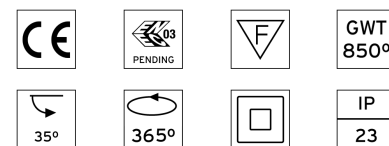

Light Supply Adjustable No Trim Dimmable . Accessories

Optical



● 08.8049.14

Honeycomb. Small Cells



● 08.8377.14

Honeycomb. Big Cells



● 08.8242.14

Screening crosspiece



○ 08.8117.68

Flood lens



○ 08.8118.68

Elliptical lens



○ 08.8450.00

**Light Supply Adjustable
spare reflector. Spot**



○ 08.8451.00

**Light Supply Adjustable
spare reflector. Medium**



○ 08.8452.00

**Light Supply Adjustable
spare reflector. Flood**



● 08.8453.40

Highly-efficient cylinder




**Light Supply Adjustable No
Trim Dimmable**

designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

○ 03.6820.40ADA - 1937lm White

● 03.6820.14ADA - 1937lm Black



CERTIFICATIONS



Light Supply Adjustable No Trim Dimmable . Accessories


Mounting



○ 08.8119.00

Pre-installation frame

Pre-installation frame.



○ SA.6600.1

Soft Architecture installation plate

Soft Architecture installation plate for integration in plasterboard.



Light Supply Adjustable No Trim Dimmable

designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

○ 03.6820.40ADA - 1937lm White

● 03.6820.14ADA - 1937lm Black

Light Supply Adjustable No Trim Dimmable . Lamps



LED Array

Lamp category:


LED

Socket:

Special base

Lamp type:

LED Array



CERTIFICATIONS

