

### **LIGHT SUPPLY FIXED NO TRIM**

Number of heads

**Mounting** Ceiling recessed

LED Array High Performances 29W 3402 Im 3000K CRI 80

Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

**Notes** Pre-installation frame. To be ordered separately.

#### **OPTICAL**

Aiming Fixed
Light distribution symmetry Symmetric

#### **ELECTRICAL**

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II


#### **PHYSICAL**

Cutout diameter (mm) 156

Recessed depth (mm) 277

Construction material Aluminium

Weight (kg) 0,98

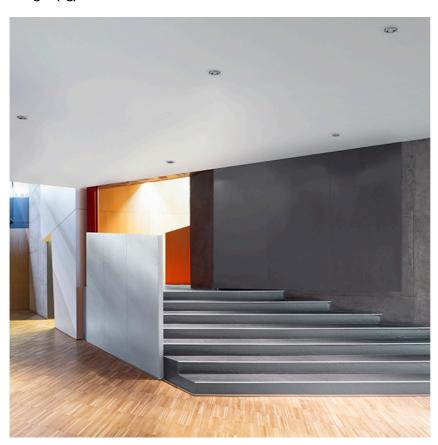




**Light Supply Fixed No Trim** designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.





### **CERTIFICATIONS**











Flos.architectural@flos.com www.flos.com



### **Light Supply Fixed No Trim. Accessories**

### Mounting



08.8359.00

Pre-installation frame

Pre-installation frame.

# **Light Supply Fixed No Trim. Lamps**



**LED Array** 

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



**Light Supply Fixed No Trim** designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

03.6824.40A - 62° - 1799lm White 03.6824.06A - 47° - 2123lm Aluminum



## **CERTIFICATIONS**













Flos.architectural@flos.com www.flos.com