

LIGHT SUPPLY FIXED NO TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array High Performances 29W 3402 lm 3000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Pre-installation frame. To be ordered separately.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	156
Recessed depth (mm)	277
Construction material	Aluminium
Weight (kg)	0,98




Light Supply Fixed No Trim Dimmable
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6824.40ADA - 62° - 1799lm White
- 03.6824.06ADA - 47° - 2123lm Aluminum

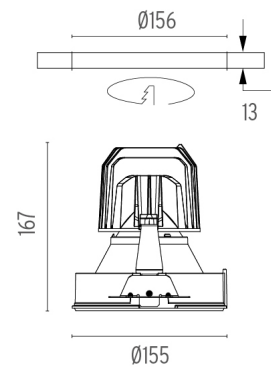

CERTIFICATIONS

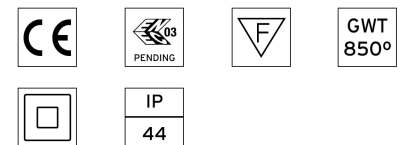

Light Supply Fixed No Trim Dimmable . Accessories

Mounting



○ 08.8359.00

Pre-installation frame

Pre-installation frame.



Light Supply Fixed No Trim Dimmable
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

● 03.6824.40ADA - 62° - 1799lm White

● 03.6824.06ADA - 47° - 2123lm Aluminum

Light Supply Fixed No Trim Dimmable . Lamps



LED Array

Lamp category:


LED

Socket:

Special base

Lamp type:

LED Array

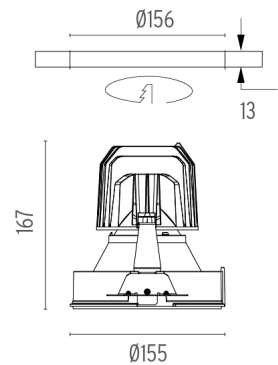

CERTIFICATIONS

