

#### LIGHT SUPPLY FIXED NO TRIM DIMMABLE

Number of heads

**Mounting** Ceiling recessed

**Lamps description** LED Array High Performances 29W 2929 lm 4000K CRI 90

Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

**Notes** Pre-installation frame. To be ordered separately.

**OPTICAL** 

Aiming Fixed
Light distribution symmetry Symmetric

**ELECTRICAL** 

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable 1-10V, Electronic dimmable dali

Emergency Without Insulation class Class II


**PHYSICAL** 

Cutout diameter (mm) 156

Recessed depth (mm) 277

Construction material Aluminium

Weight (kg) 0,98

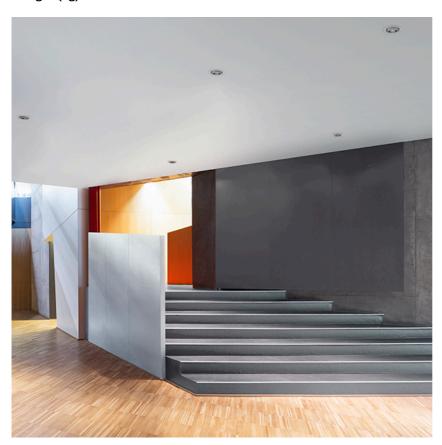




**Light Supply Fixed No Trim Dimmable** designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.





### **CERTIFICATIONS**









□ | IP | 44

Flos.architectural@flos.com www.flos.com



## **Light Supply Fixed No Trim Dimmable . Accessories**

### Mounting



08.8359.00

Pre-installation frame

Pre-installation frame.

# **Light Supply Fixed No Trim Dimmable . Lamps**



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



**Light Supply Fixed No Trim Dimmable** designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

03.6825.40ADA - 62° - 1549lm White 03.6825.06ADA - 47° - 1828lm Aluminum



## **CERTIFICATIONS**











Flos.architectural@flos.com www.flos.com