

### LIGHT SUPPLY WALL-WASHER NO TRIM DIMMABLE

Number of heads

**Mounting** Ceiling recessed

**Lamps description** LED Array High Performances 33,2W 3770 lm 3000K CRI 80

Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

**Notes** Pre-installation frame. To be ordered separately.

**OPTICAL** 

Aiming Fixed
Light distribution symmetry Asymmetric

**ELECTRICAL** 

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable 1-10V, Electronic dimmable dali

Emergency Without Insulation class Class II


### **PHYSICAL**

Cutout diameter (mm) 155


Recessed depth (mm) 290

Construction material Aluminium

Weight (kg) 1,01

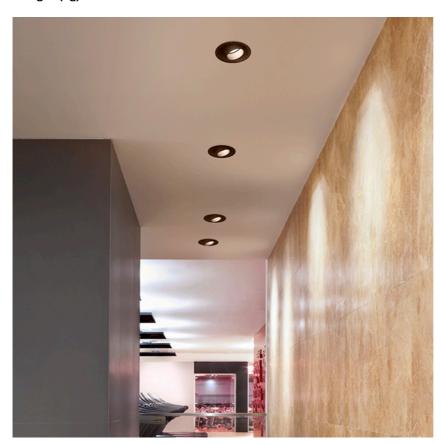






designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.<nextline>

03.6827.40ADA - 36° - 2142lm White

03.6827.06ADA - 34° - 2310lm Aluminum



### **CERTIFICATIONS**











IP 44

Flos.architectural@flos.com www.flos.com



# Light Supply Wall-Washer No Trim Dimmable . Accessories

### Mounting



08.8137.00

Pre-installation frame

Pre-installation frame.

## Light Supply Wall-Washer No Trim Dimmable . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




Light Supply Wall-Washer No Trim Dimmable

designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.<nextline>

03.6827.40ADA - 36° - 2142lm White 03.6827.06ADA - 34° - 2310lm Aluminum



## **CERTIFICATIONS**











Flos.architectural@flos.com www.flos.com