

## LIGHT STRIPE DALI VERSION 300 MM

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Top LED 7,5W 618 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	24
<b>Environment</b>	Indoor
<b>Notes</b>	The endcaps increase the product in 3 mm. Running Magnet 2.0 luminaires are not compatible with Running Magnet 1.0.



### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	108°

### Light Stripe Dali Version 300 mm designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.



### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without

● 03.7000.14DA - 400lm Black

### PHYSICAL

<b>Length (mm)</b>	306
<b>Weight (kg)</b>	0,34

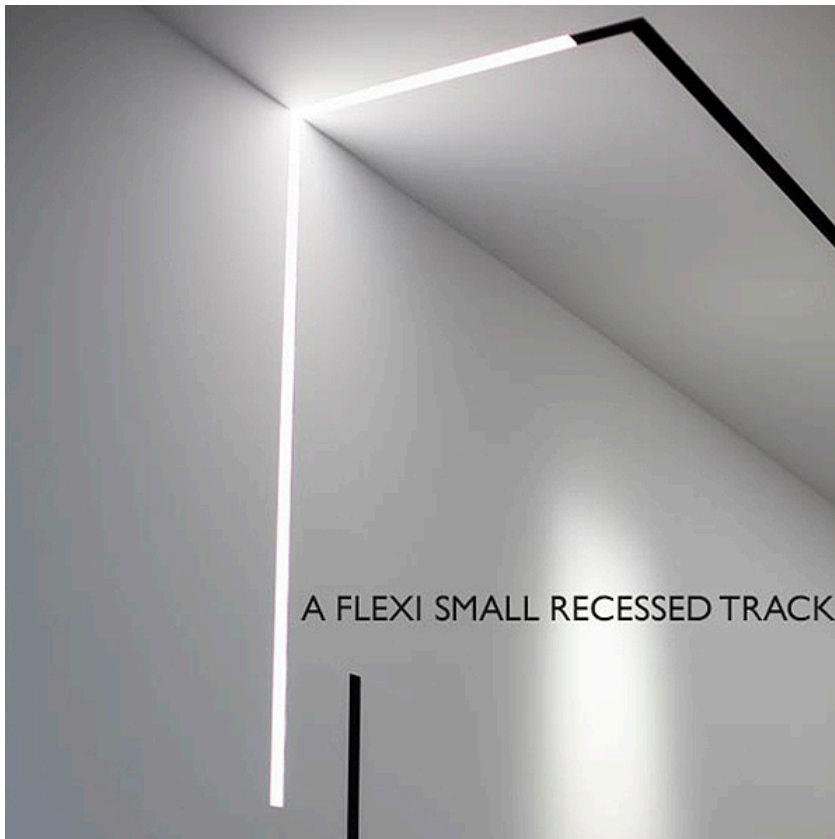

### CERTIFICATIONS



## Light Stripe Dali Version 300 mm . Lamps




**Top LED**

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Top LED

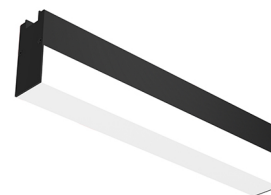

**Light Stripe Dali Version 300 mm**  
designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

● 03.7000.14DA - 400lm Black



### CERTIFICATIONS

