

LIGHT STRIPE DALI VERSION 300 MM

Number of heads	1
Mounting	Track mounting
Lamps description	Top LED 7,5W 653 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	The endcaps increase the product in 3 mm. Running Magnet 2.0 luminaires are not compatible with Running Magnet 1.0.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	108°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without

PHYSICAL



Length (mm)	306
Weight (kg)	0,34





Light Stripe Dali Version 300 mm designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

● 03.7001.14DA - 420lm Black

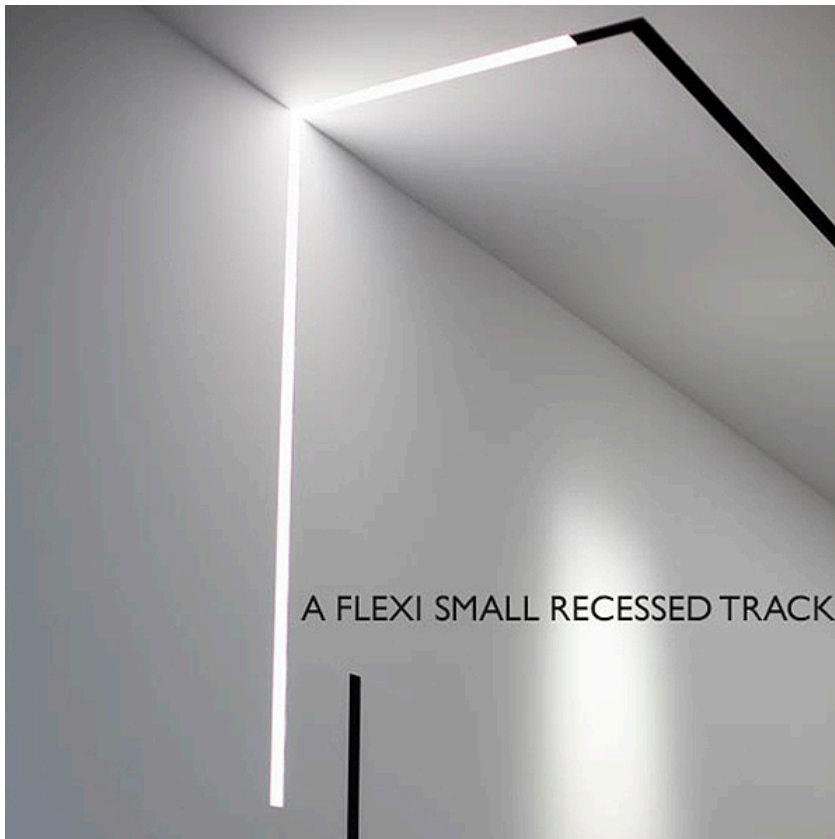

CERTIFICATIONS

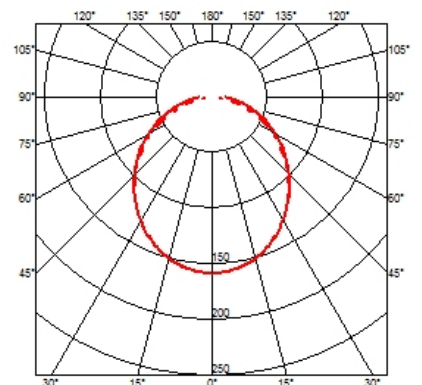

Light Stripe Dali Version 300 mm . Lamps




Top LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Top LED

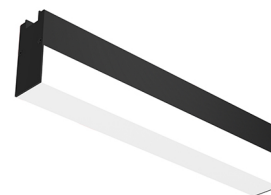

Light Stripe Dali Version 300 mm
designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

● 03.7001.14DA - 420lm Black



CERTIFICATIONS

