

## **LIGHT STRIPE DALI VERSION 600 MM**

Number of heads

**Mounting** Track mounting

Lamps description Top LED 15W 1237 lm 2700K CRI 90

Luminaire luminous flux See reference number

Voltage (V) 24 Environment Indoor

Notes The endcaps increase the product in 3 mm. Running Magnet

2.0 luminaires are not compatible with Running Magnet 1.0.

### **OPTICAL**

AimingFixedLight distribution symmetrySymmetricBeam angle108°

### **ELECTRICAL**


Transformer availability Separate item
Transformer mounting Remote

Transformer type Electronic dimmable dali

**Emergency** Without

### **PHYSICAL**

**Length (mm)** 606 **Weight (kg)** 0,68

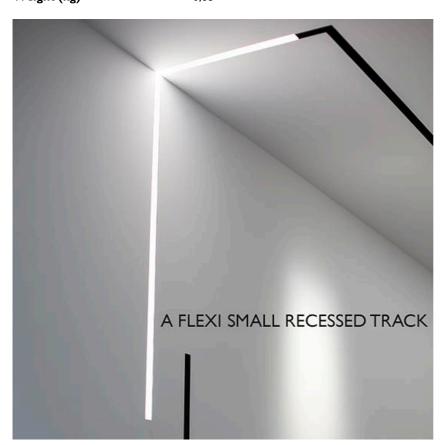



# **Light Stripe Dali Version 600 mm** designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

03.7002.14DA - 800lm Black

### CERTIFICATIONS









Flos.architectural@flos.com www.flos.com



# Light Stripe Dali Version 600 mm . Lamps



**Top LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED




Light Stripe Dali Version 600 mm designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

03.7002.14DA - 800lm

Black



### **CERTIFICATIONS**









Flos.architectural@flos.com www.flos.com