

LIGHT STRIPE DALI VERSION 1200 MM

Number of heads	1
Mounting	Track mounting
Lamps description	Top LED 30W 2473 lm 2700K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	The endcaps increase the product in 3 mm. Running Magnet 2.0 luminaires are not compatible with Running Magnet 1.0.



OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	108°

Light Stripe Dali Version 1200 mm designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.



ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without

● 03.7006.14DA - 1600lm Black

PHYSICAL

Length (mm)	1206
Weight (kg)	1,36

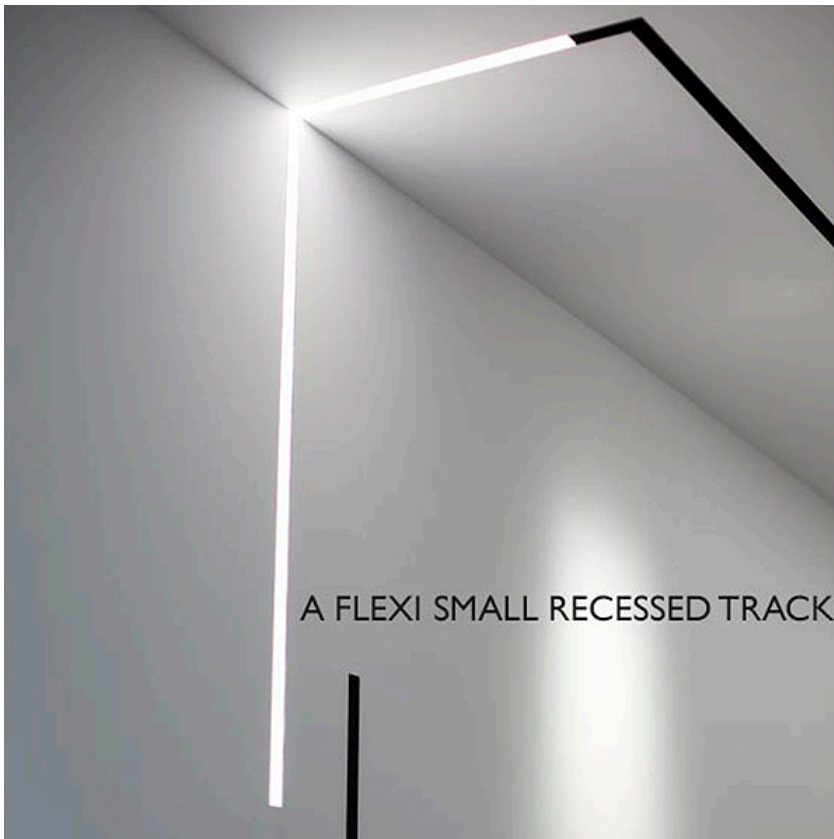

A FLEXI SMALL RECESSED TRACK

CERTIFICATIONS



Light Stripe Dali Version 1200 mm . Lamps



Top LED

Lamp category:


LED

Socket:

Special base

Lamp type:


Top LED



Light Stripe Dali Version 1200 mm
designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

● 03.7006.14DA - 1600lm Black



CERTIFICATIONS

