

# FLOS

## SPOT 50 DIMMABLE I-10V

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Power LED 3,5W 307 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	48
<b>Environment</b>	Indoor
<b>Notes</b>	Accessories included (honeycomb and screening crosspiece). Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.



### OPTICAL




<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	26° Medium

### Spot 50 Dimmable I-10V designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>


### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable I-10V
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III


	03.8033.40.IV - 212lm	White
	03.8033.05.IV - 212lm	Chrome
	03.8033.14.IV - 212lm	Black

### PHYSICAL

<b>Spot diameter (mm)</b>	24
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,05



### CERTIFICATIONS

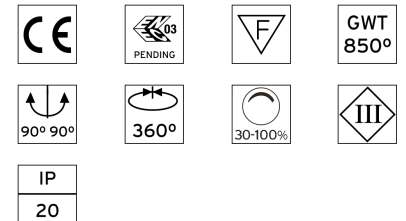

## Spot 50 Dimmable I-10V . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED



**Spot 50 Dimmable I-10V**  
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8033.40.1V - 212lm White
- 03.8033.05.1V - 212lm Chrome
- 03.8033.14.1V - 212lm Black



**CERTIFICATIONS**

