

FLOS

SPOT 90 DIMMABLE I-10V

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED 8,5W 656 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	48
Environment	Indoor
Notes	Accessories included (honeycomb and screening crosspiece). Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.



OPTICAL




Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	22° Medium

Spot 90 Dimmable I-10V designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V
Emergency	Without
Insulation class	Class III


	03.8045.40.1V - 406lm	White
	03.8045.05.1V - 406lm	Chrome
	03.8045.14.1V - 406lm	Black

PHYSICAL

Spot diameter (mm)	35
Construction material	Aluminium
Weight (kg)	0,18



CERTIFICATIONS

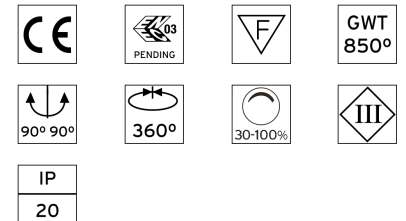

Spot 90 Dimmable I-10V . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Spot 90 Dimmable I-10V
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8045.40.1V - 406lm White
- 03.8045.05.1V - 406lm Chrome
- 03.8045.14.1V - 406lm Black



CERTIFICATIONS

