

FLOS

SPOT 120 DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED 12W 779 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	48
Environment	Indoor
Notes	Accessories included (honeycomb and screening crosspiece). Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.



OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	17° Medium

Spot 120 Dali Version

designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III


- 03.8055.40.DA - 505lm White
- 03.8055.05.DA - 505lm Chrome
- 03.8055.14.DA - 505lm Black

PHYSICAL

Spot diameter (mm)	46
Construction material	Aluminium
Weight (kg)	0,30



CERTIFICATIONS

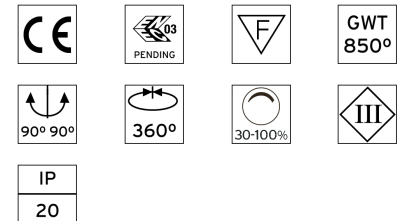

Spot 120 Dali Version . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Spot 120 Dali Version
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8055.40.DA - 505lm White
- 03.8055.05.DA - 505lm Chrome
- 03.8055.14.DA - 505lm Black



CERTIFICATIONS

