## FLOS

#### SPOT 150 ON BOARD DIMMER

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment Notes I Track mounting LED Array 22,5W 2000 Im 2700K CRI 90 See reference number 48 Indoor Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time.

### OPTICAL

Aiming Light distribution symmetry Beam angle

#### ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

#### PHYSICAL

Spot diameter (mm) Construction material Weight (kg) 57 Aluminium 0,30

Adjustable

Symmetric

28° Medium

Separate item

Electronic dimmable

Remote

Without Class III




Flos.architectural@flos.com





Spot 150 On Board Dimmer designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>












# FLOS

#### Spot 150 On Board Dimmer . Accessories

Optical

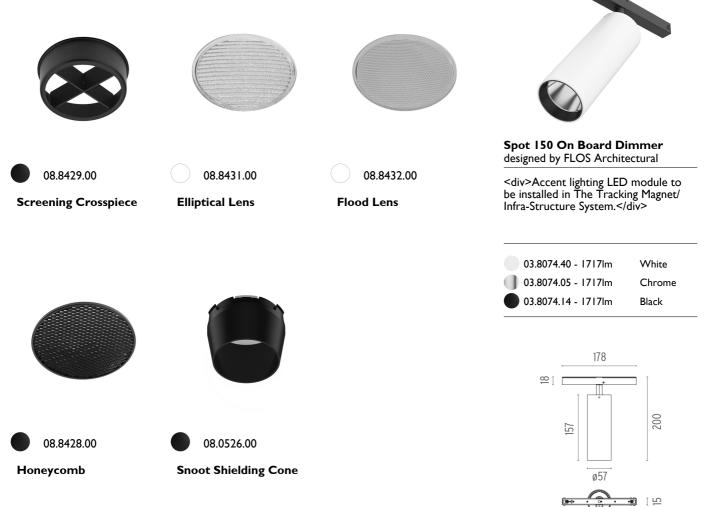





### FLOS

Spot 150 On Board Dimmer . Lamps



LED Array LED Socket: Special base Lamp type: LED Array



Spot 150 On Board Dimmer designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>



