

## SPOT 150 ON BOARD DIMMER

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	LED Array 22,5W 2000 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	48
<b>Environment</b>	Indoor
<b>Notes</b>	Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time.



### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	40° Flood

### ELECTRICAL




<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III


### PHYSICAL

<b>Spot diameter (mm)</b>	57
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,30


### Spot 150 On Board Dimmer designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

	03.8076.40 - 1738lm	White
	03.8076.05 - 1738lm	Chrome
	03.8076.14 - 1738lm	Black

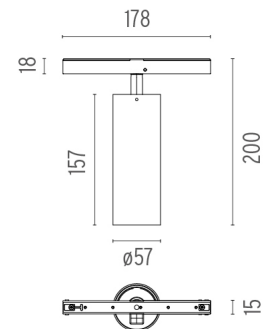

### CERTIFICATIONS

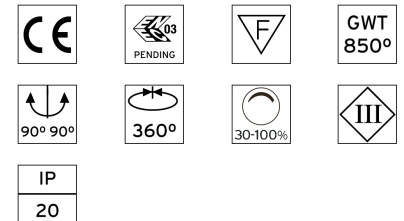

## Spot 150 On Board Dimmer . Accessories

### Optical



● 08.8429.00  
**Screening Crosspiece**



○ 08.8431.00  
**Elliptical Lens**



○ 08.8432.00  
**Flood Lens**



● 08.8428.00  
**Honeycomb**




● 08.0526.00  
**Snoot Shielding Cone**




**Spot 150 On Board Dimmer**  
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8076.40 - 1738lm White
- 03.8076.05 - 1738lm Chrome
- 03.8076.14 - 1738lm Black



### CERTIFICATIONS

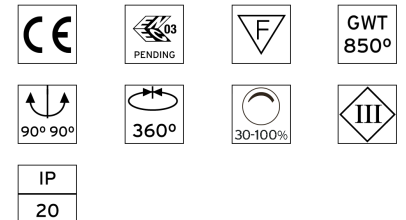

## Spot 150 On Board Dimmer . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**


LED Array



**Spot 150 On Board Dimmer**  
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8076.40 - 1738lm White
- 03.8076.05 - 1738lm Chrome
- 03.8076.14 - 1738lm Black



**CERTIFICATIONS**

