

SPOT 150 DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 22,5W 2115 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	48
Environment	Indoor
Notes	Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time. Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.



Spot 150 Dali Version
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	40° Flood


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III


- 03.8077.40.DA - 1838lm White
- 03.8077.05.DA - 1838lm Chrome
- 03.8077.14.DA - 1838lm Black

PHYSICAL

Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,30

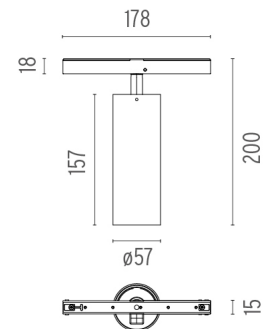

CERTIFICATIONS

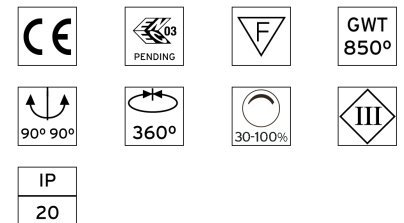

Spot 150 Dali Version . Accessories

Optical



● 08.8429.00

Screening Crosspiece



○ 08.8431.00

Elliptical Lens



○ 08.8432.00

Flood Lens



● 08.8428.00

Honeycomb



● 08.0526.00


Snoot Shielding Cone



Spot 150 Dali Version
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8077.40.DA - 1838lm White
- 03.8077.05.DA - 1838lm Chrome
- 03.8077.14.DA - 1838lm Black



CERTIFICATIONS



Spot 150 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




Spot 150 Dali Version

designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8077.40.DA - 1838lm White
- 03.8077.05.DA - 1838lm Chrome
- 03.8077.14.DA - 1838lm Black



CERTIFICATIONS

