

SUSPENSION GLASS DOWNLIGHT I 10 BLACK ROD 100 MM DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 13,5W 1296 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	48
Environment	Indoor
Notes	Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III

PHYSICAL

Weight (kg)	1
--------------------	---




Suspension Glass Downlight I 10 Black Rod 100 mm Dali Version



designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.</div>

- 03.8130.00.DA - 82° - 706lm Transparent Glass
- 03.8130.FU.DA - 47° - 483lm Smoked Glass
- 03.8130.RC.DA - 42° - 292lm Red Glass



CERTIFICATIONS

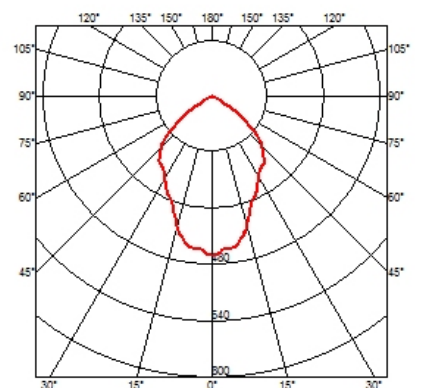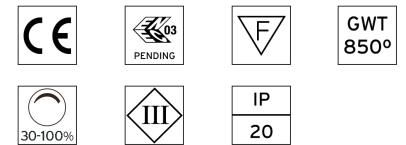

Suspension Glass Downlight I 10 Black Rod 100 mm Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




Suspension Glass Downlight I 10 Black Rod 100 mm Dali Version

designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.</div>

- 03.8130.00.DA - 82° - 706lm Transparent Glass
- 03.8130.FU.DA - 47° - 483lm Smoked Glass
- 03.8130.RC.DA - 42° - 292lm Red Glass



CERTIFICATIONS

