

SUSPENSION GLASS DOWNLIGHT I 10 BLACK ROD 400 MM DALI VERSION

| | |
|--------------------------------|---|
| Number of heads | I |
| Mounting | Track mounting |
| Lamps description | LED Array 13,5W 1296 lm 2700K CRI 90 |
| Luminaire luminous flux | Extreme Cut-off. See reference number |
| Voltage (V) | 48 |
| Environment | Indoor |
| Notes | Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version. |

OPTICAL

| | |
|------------------------------------|-----------|
| Aiming | Fixed |
| Light distribution symmetry | Symmetric |

ELECTRICAL

| | |
|---------------------------------|--------------------------|
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Transformer type | Electronic dimmable dali |
| Emergency | Without |
| Insulation class | Class III |

PHYSICAL

| | |
|--------------------|---|
| Weight (kg) | I |
|--------------------|---|




Suspension Glass Downlight I 10 Black Rod 400 mm Dali Version



designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.</div>

- 03.8131.00.DA - 82° - 706lm Transparent Glass
- 03.8131.FU.DA - 47° - 483lm Smoked Glass
- 03.8131.RC.DA - 42° - 292lm Red Glass

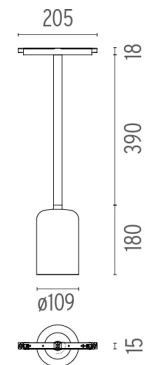

CERTIFICATIONS

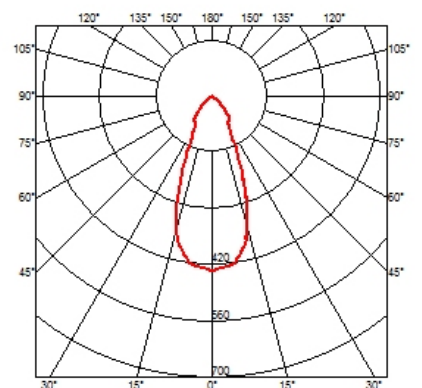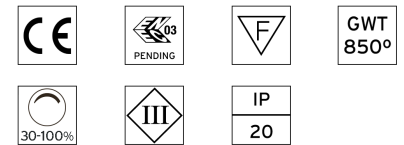

Suspension Glass Downlight I 10 Black Rod 400 mm Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




Suspension Glass Downlight I 10 Black Rod 400 mm Dali Version

designed by Vincent Van Duysen

Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.

- 03.8131.00.DA - 82° - 706lm Transparent Glass
- 03.8131.FU.DA - 47° - 483lm Smoked Glass
- 03.8131.RC.DA - 42° - 292lm Red Glass

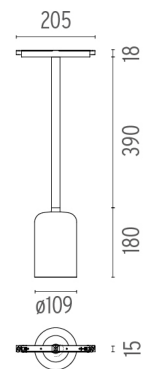

CERTIFICATIONS

