

SUSPENSION GLASS DOWNLIGHT I 10 WHITE ROD 100 MM DIMMABLE I-10V

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 13,5W 1296 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	48
Environment	Indoor
Notes	Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.



OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V
Emergency	Without
Insulation class	Class III

Suspension Glass Downlight I 10 White Rod 100 mm Dimmable I-10V


designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.</div>



- 03.8135.00.IV - 82° - 706lm Transparent Glass
- 03.8135.FU.IV - 47° - 483lm Smoked Glass
- 03.8135.RC.IV - 42° - 292lm Red Glass

PHYSICAL

Weight (kg)	1
--------------------	---



CERTIFICATIONS

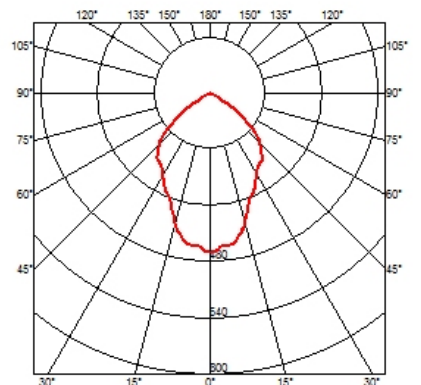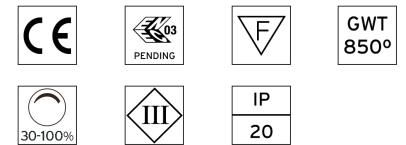

Suspension Glass Downlight I 10 White Rod 100 mm Dimmable 1-10V . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




**Suspension Glass Downlight I 10
White Rod 100 mm Dimmable 1-10V**

designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.</div>

- 03.8135.00.IV - 82° - 706lm Transparent Glass
- 03.8135.FU.IV - 47° - 483lm Smoked Glass
- 03.8135.RC.IV - 42° - 292lm Red Glass



CERTIFICATIONS

